



LEDLENSER AF4R Work/AF8R Work

LEDLENSER AF4R Work/AF8R Work

AF4R Work

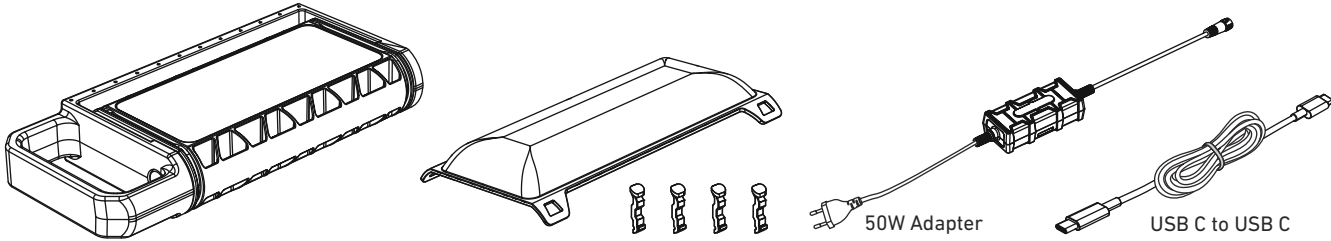


AF8R Work

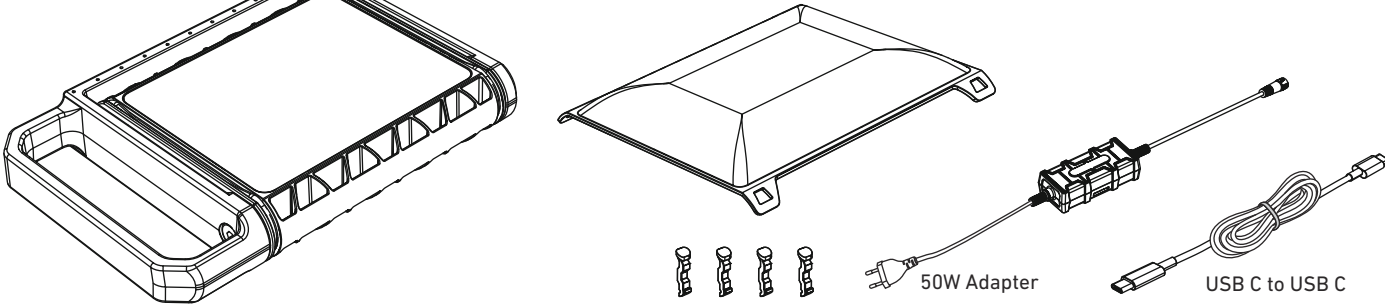

AF4R Work

LED Module: AT10C CCT LED Module


This product contains light sources of energy efficiency class E
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
Este producto contiene una fuente luminosa de la clase de eficiencia energética E
Ce produit contient une source lumineuse de classe d'efficacité énergétique E

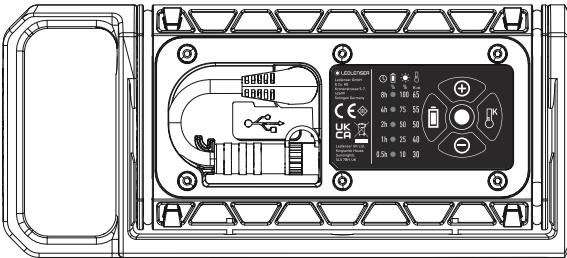


AF8R Work

LED Module: AT10C CCT LED Module


This product contains light sources of energy efficiency class E
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
Este producto contiene una fuente luminosa de la clase de eficiencia energética E
Ce produit contient une source lumineuse de classe d'efficacité énergétique E

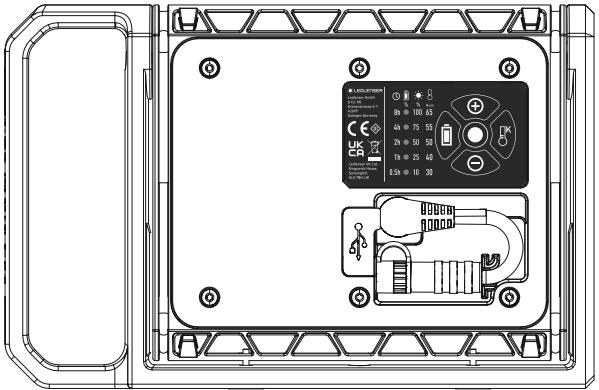


Diffusor

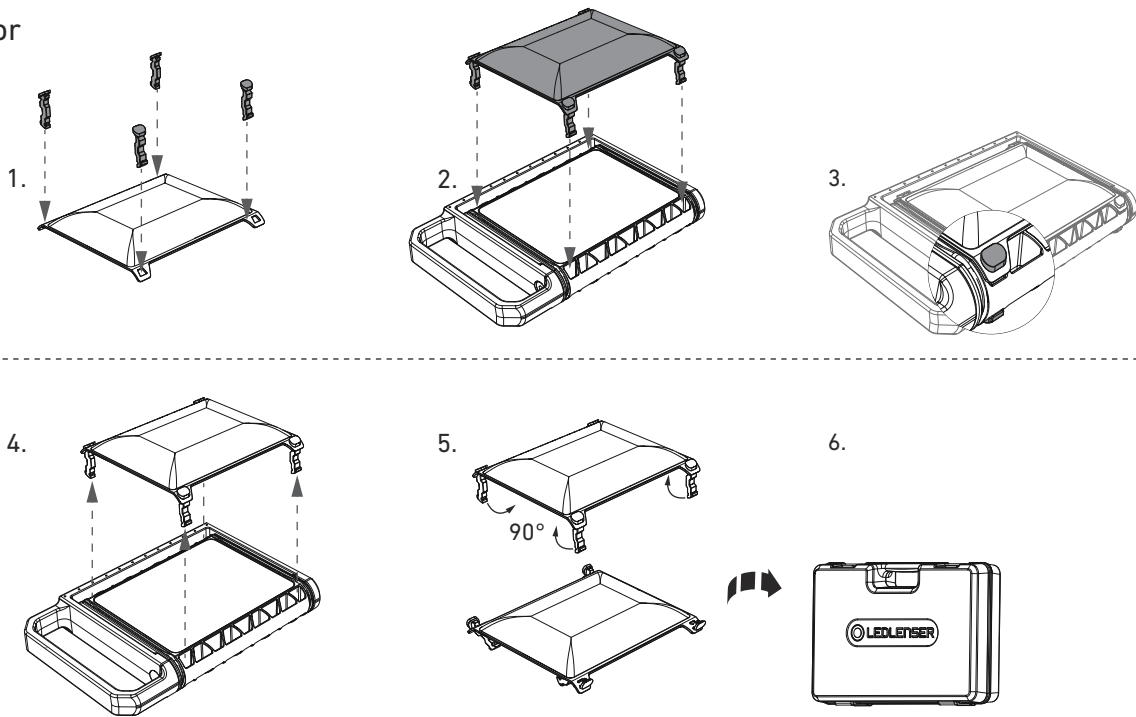



AF4R Work

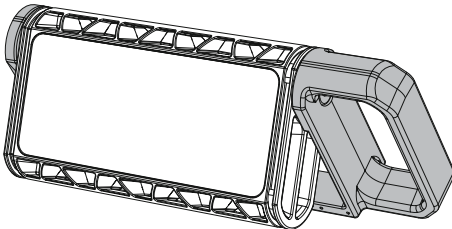



AF8R Work

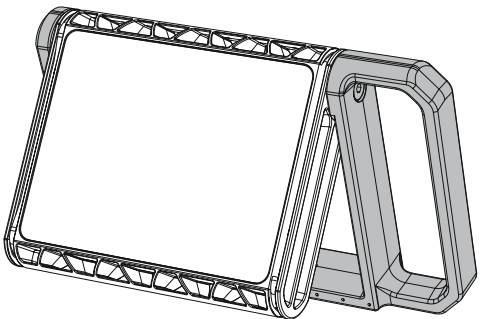



AF4R/AF8R Work

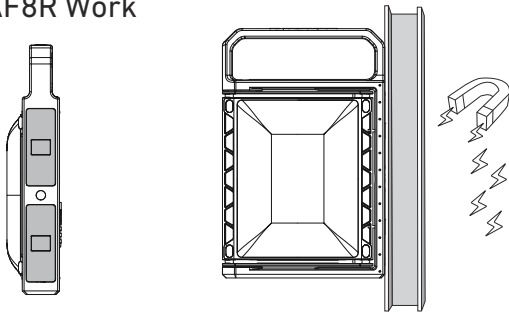


Minimum distance from lighted objects

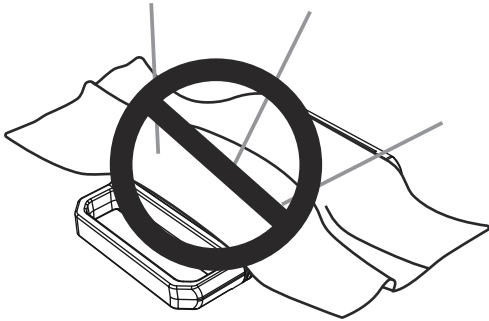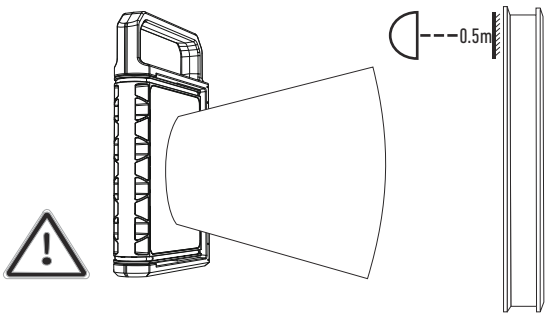

1xM10 Hole

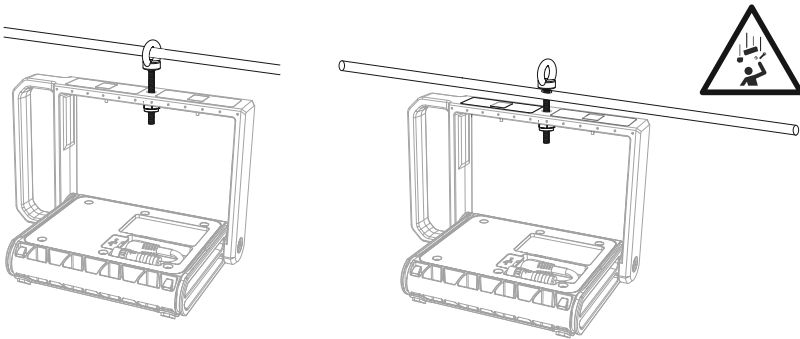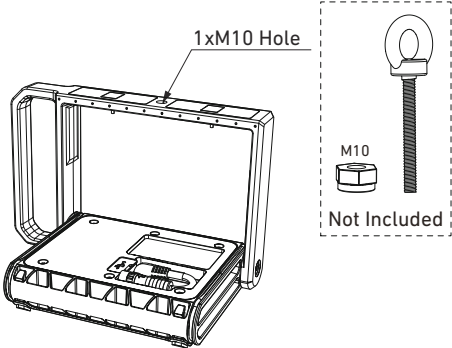

Product			
IP Class	IP67	IP44	IP20

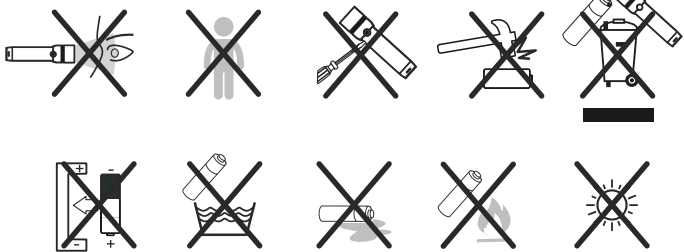

Ledlenser GmbH & Co. KG
Kronenstrasse 5-7 • 42699 Solingen • Germany
Phone +49 212/5948-0 Fax +49 212/5948-200
info@ledlenser.com




ledlenser.com




LEDLENSER AF4R Work/AF8R Work

LEDLENSER AF4R Work/AF8R Work

Operation (AF4R Work/AF8R Work)

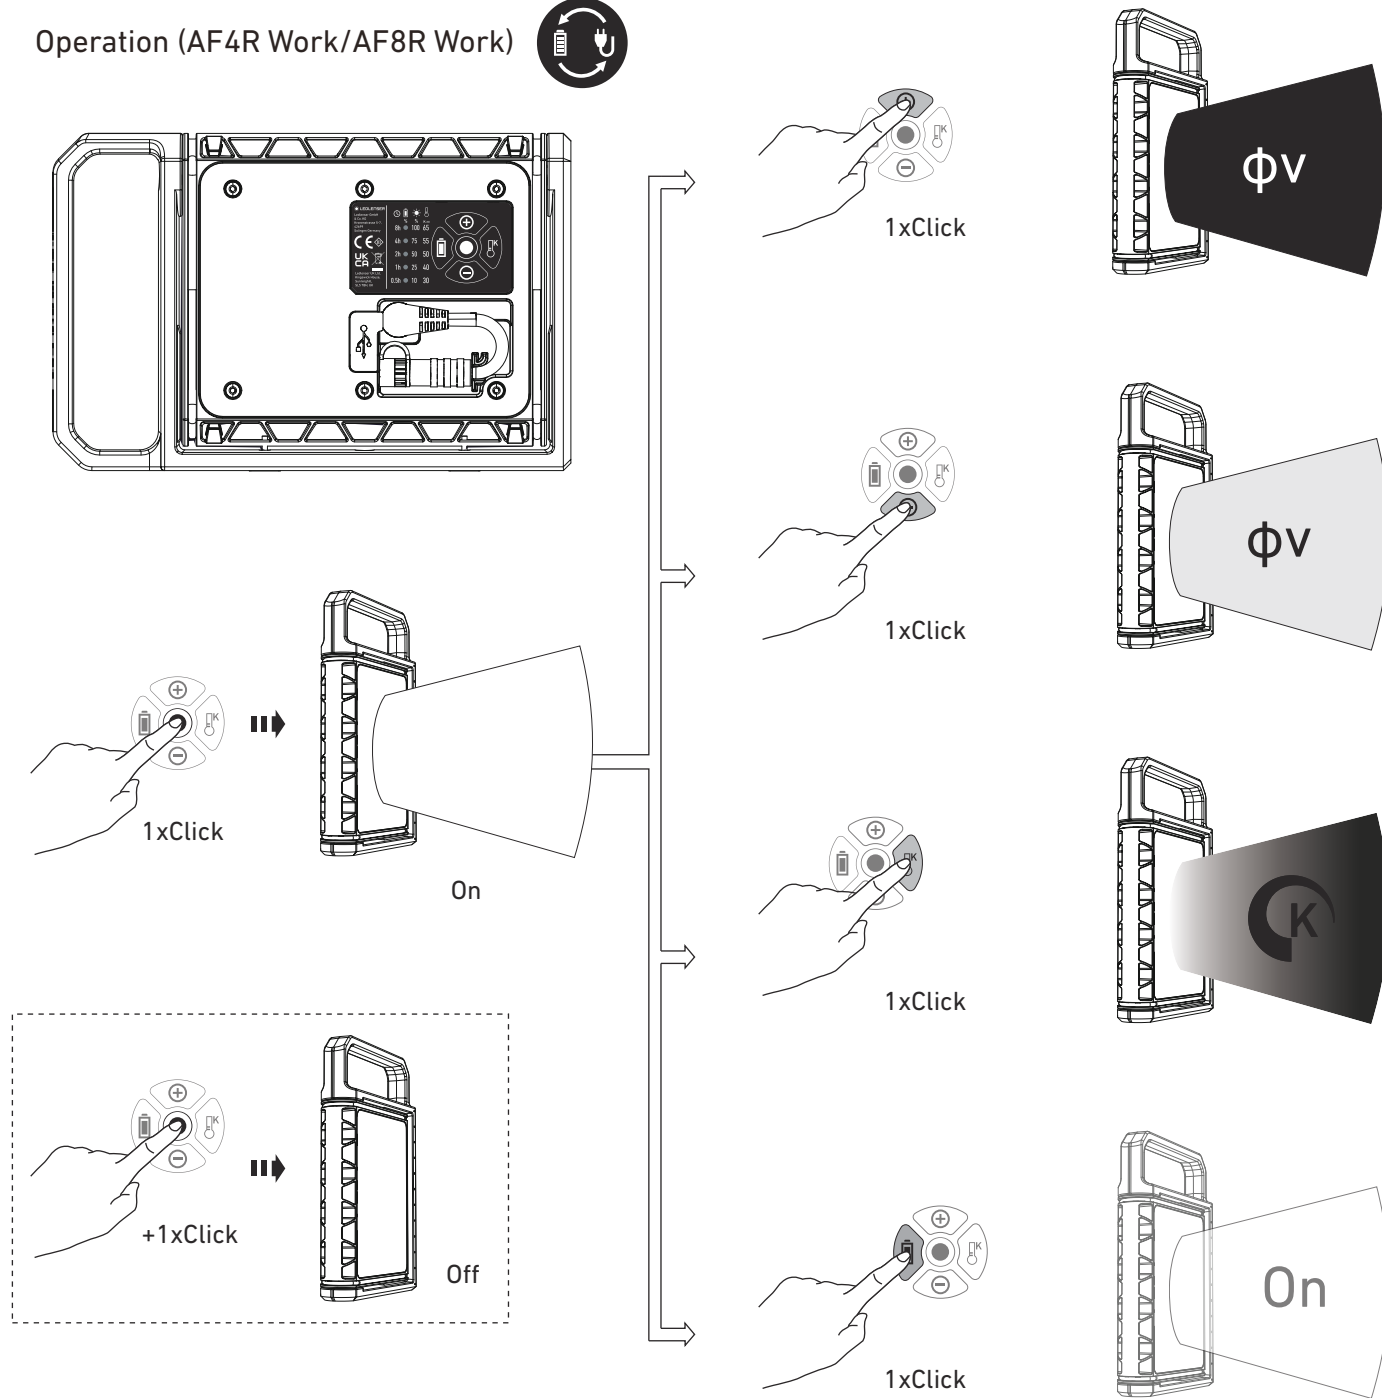


Luminous flux
10%→100%



Runtime
>5s

Green
8h ○
4h ○
2h ○
1h ●
0.5h ●


Luminous flux
100%→10%



Runtime
>5s

Green
8h ●
4h ●
2h ●
1h ●
0.5h ●


Color temperature
3000K ⇌ 6500K



Runtime
>5s

Green
8h ●
4h ●
2h ●
1h ●
0.5h ●


Battery indicator



Runtime
>5s

Green
8h ●
4h ●
2h ●
1h ●
0.5h ●


Low Battery Warning (AF4R Work/AF8R Work)

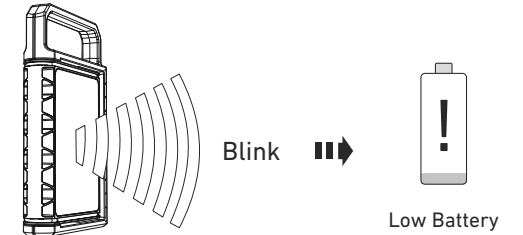

Battery Indicator (AF4R Work/AF8R Work)



Charging System (AF4R/AF8R Work)

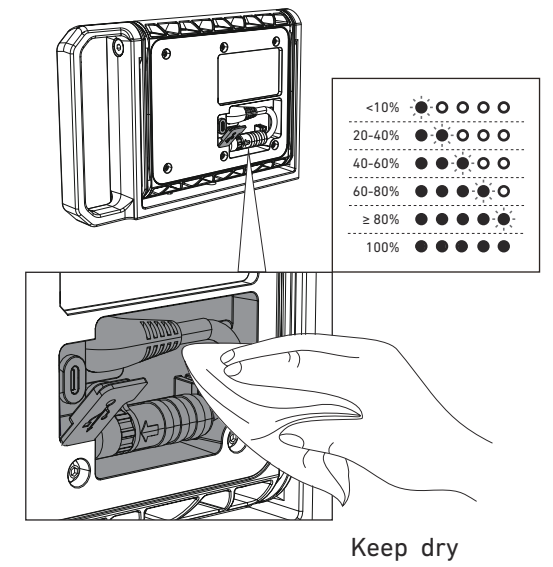

Transportation Lock (AF4R Work/AF8R Work)

