

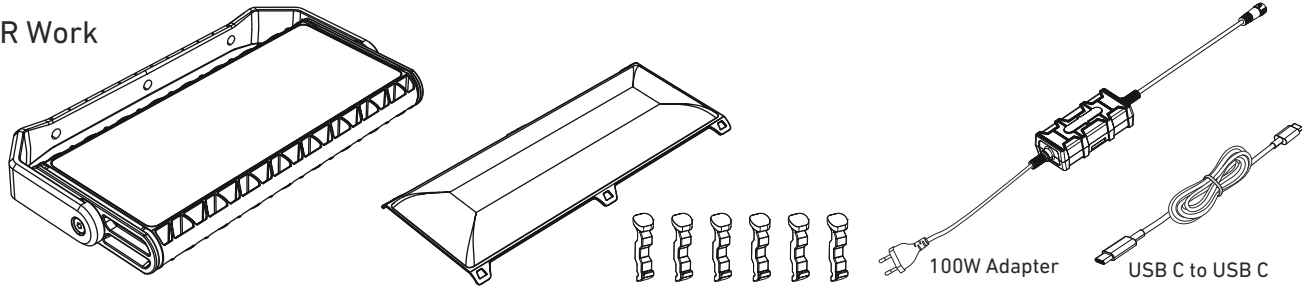




LEDLENSER AF12R Work/AF12C Work

AF12R Work



AF12C Work

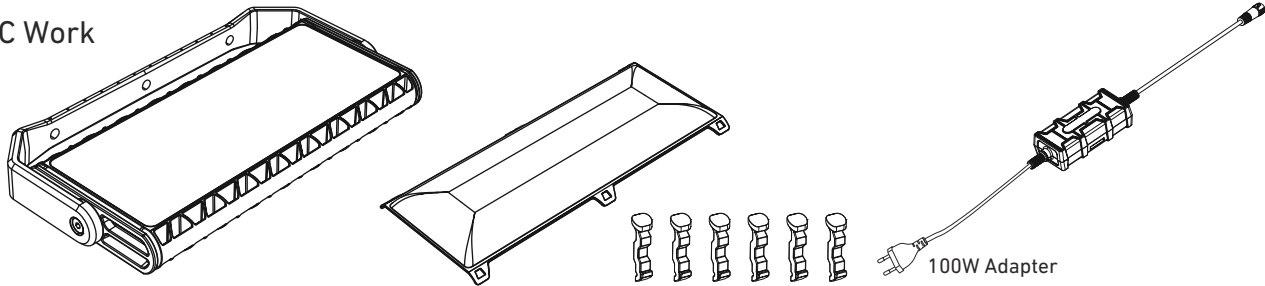


AF12R Work
LED Module: AT10C CCT LED Module

This product contains light sources of energy efficiency class E
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
Este producto contiene una fuente luminosa de la clase de eficiencia energética E
Ce produit contient une source lumineuse de classe d'efficacité énergétique E

AF12C Work
LED Module: AT10C CCT LED Module


This product contains light sources of energy efficiency class E
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
Este producto contiene una fuente luminosa de la clase de eficiencia energética E
Ce produit contient une source lumineuse de classe d'efficacité énergétique E

Battery Indicator (AF12R Work)

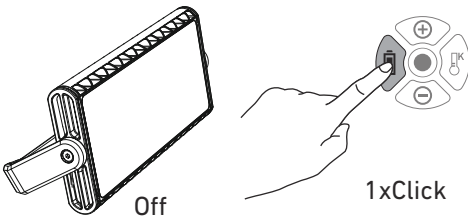


Green
<10%
10-20%
20-40%
40-60%
60-80%
≥80%


Low Battery Warning (AF12R Work)

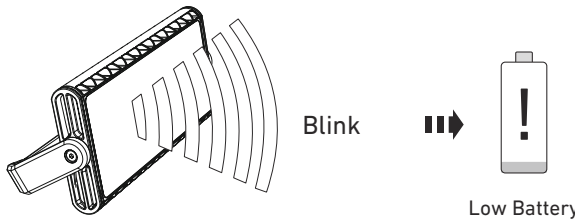

Charging System (AF12R Work)

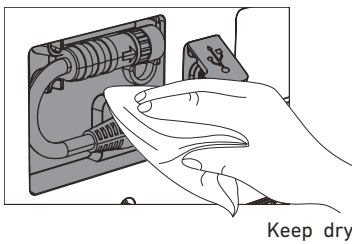


Keep dry

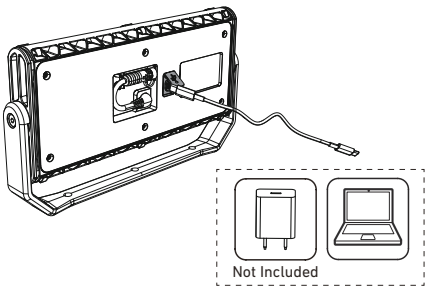


<10%
20-40%
40-60%
60-80%
≥ 80%
100%

Transportation Lock


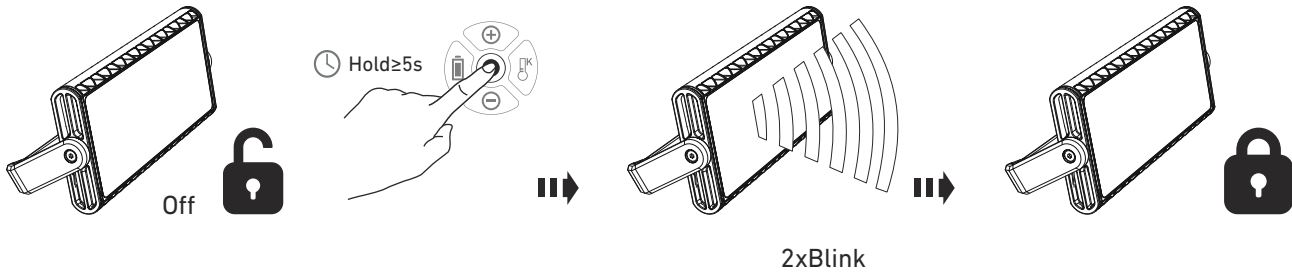


2xBlink


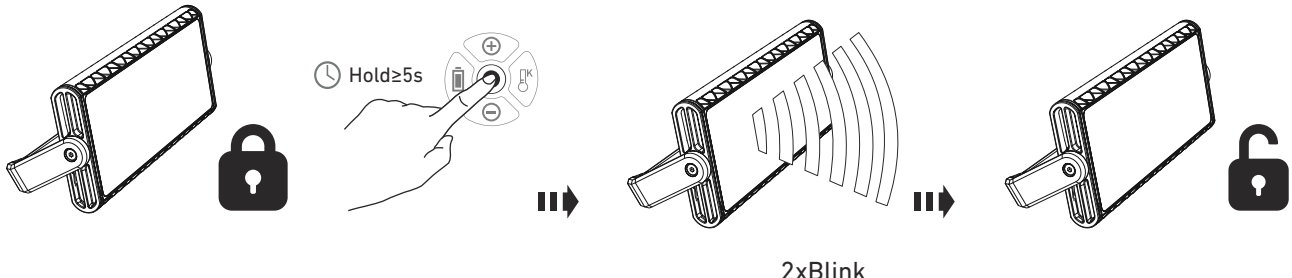


2xBlink


AF12R Work

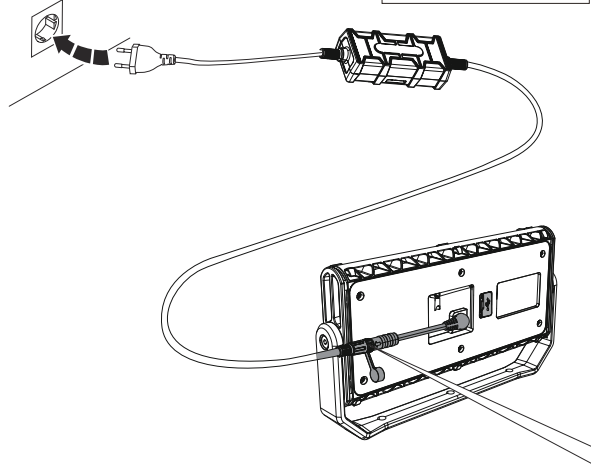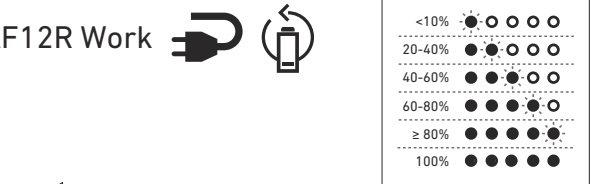


AF12C Work

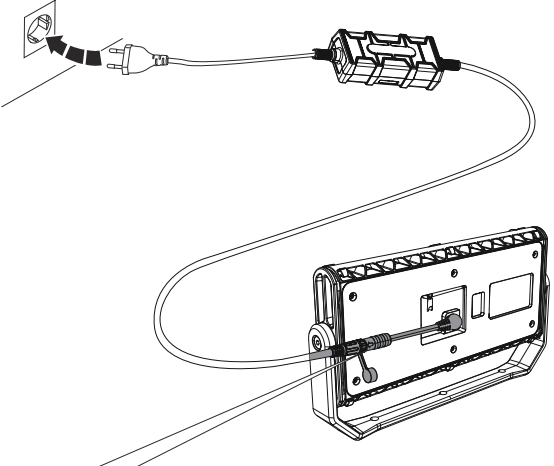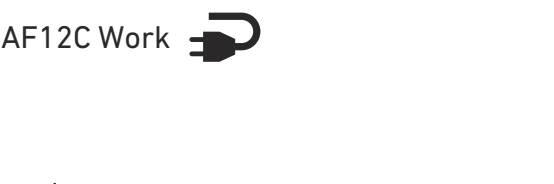


Connection

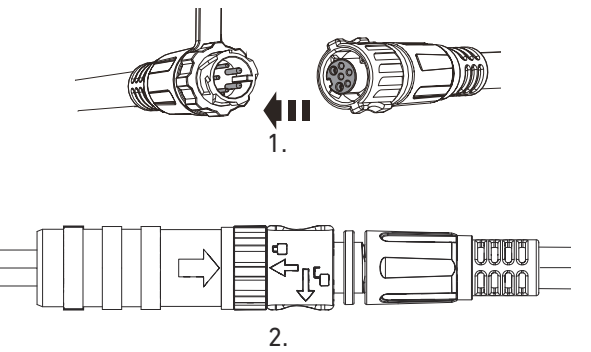


Disconnection

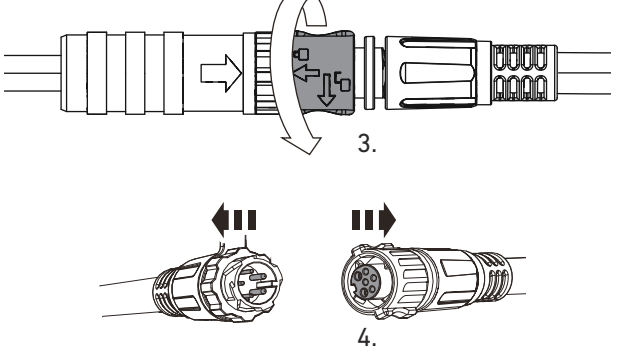

Diffusor




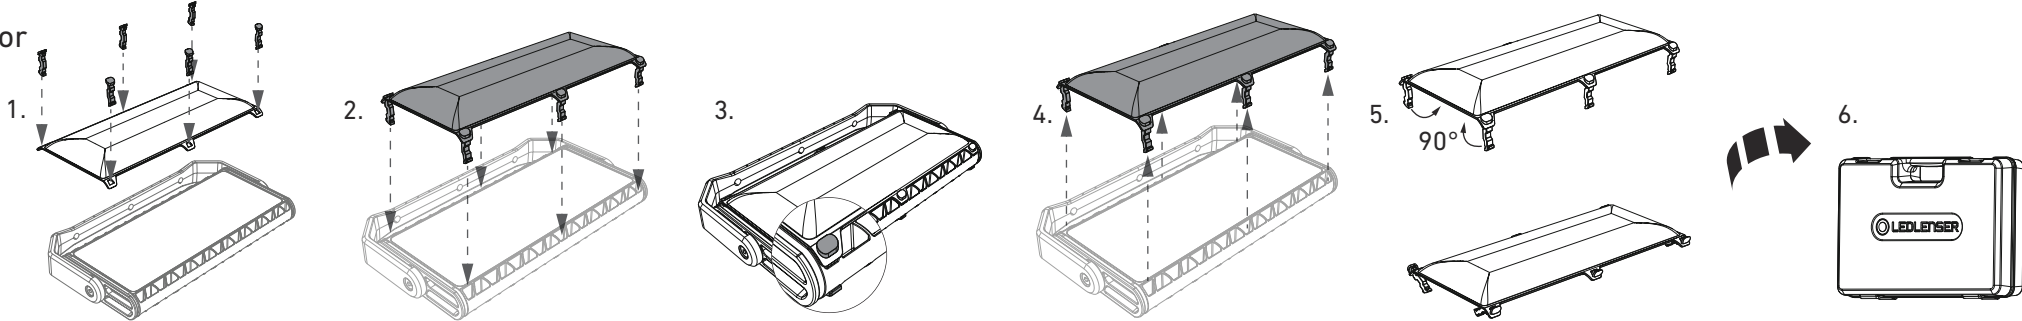


AF12R/AF12C Work

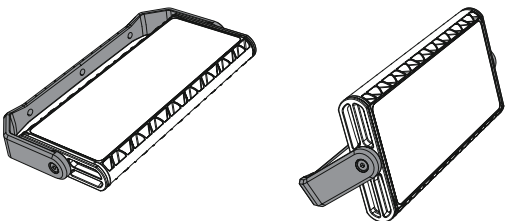

LEDLENSER AF12R Work/AF12C Work

Operation (AF12R Work)

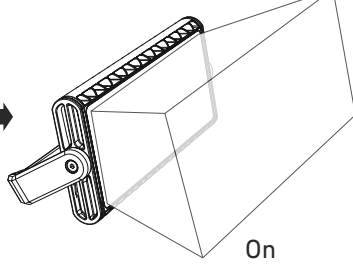




1xClick

On

Off

+1xClick







1xClick

1xClick

1xClick

1xClick



ϕv

ϕv

ϕv


On

Luminous flux
10%→100%







Luminous flux
100%→10%

Color temperature
3000K ⇌ 6500K

Battery indicator

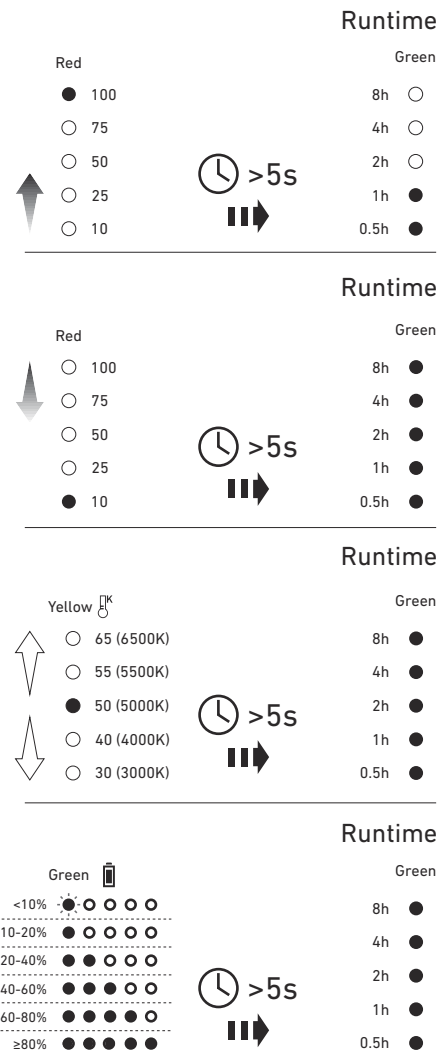

Operation (AF12C Work)

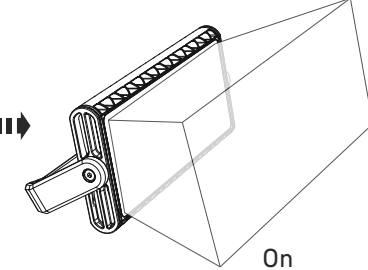




1xClick

On

Off




1xClick



1xClick

1xClick

1xClick



ϕv





ϕv


ϕv


Luminous flux
10%→100%

Luminous flux
100%→10%

Color temperature
3000K ⇌ 6500K

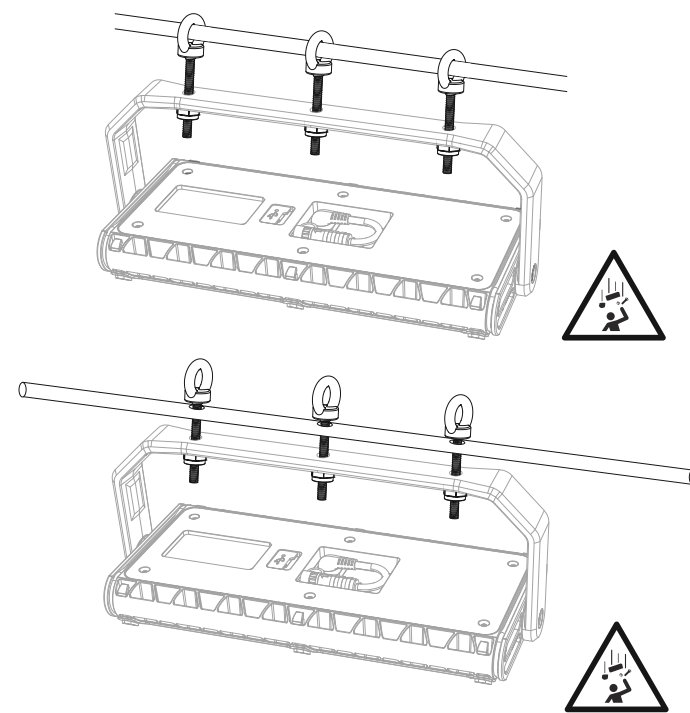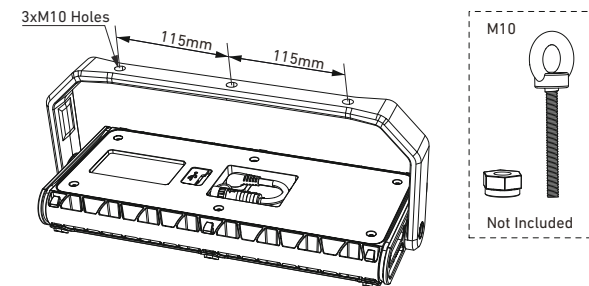

Product			
IP Class	IP67	IP44	IP20

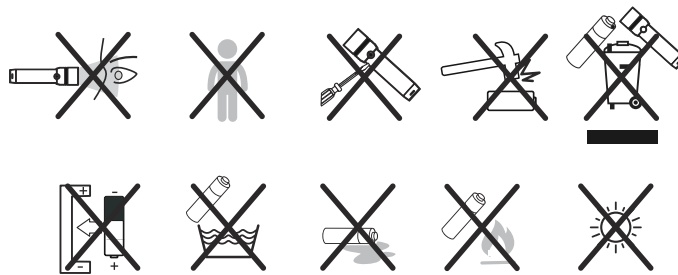

Ledlenser GmbH & Co. KG
Kronenstrasse 5-7 • 42699 Solingen • Germany
Phone +49 212/5948-0 Fax +49 212/5948-200
info@ledlenser.com

