

**DIN EN 806
DIN EN 1717
DIN 1988**

Global Standards

°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi


min. 1 bar / 14,5 psi

max. 10 bar / 145 psi

3 min.

max. 70 °C / 158 °F

- (D) Montage- und Bedienanleitung**
- (CN) 安装及操作指南**
- (CZ) Návod k instalaci a k použití**
- (E) Instrucciones de montaje y de manejo**
- (EST) Paigaldamine ja kasutamine**
- (F) Instructions de montage et d'utilisation**
- (GB) Installation and operating instructions**
- (GR) ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ**
- (H) Szerelési és használati utasítás**
- (I) Istruzioni di montaggio e per l'uso**
- (LT) Montavimo ir naudojimo instrukcija**
- (LV) Montāžas un lietošanas instrukcija**
- (NL) Montagehandleiding en Gebruiksaanwijzing**
- (PL) Instrukcja montażu i obsługi**
- (RO) Instrucțiuni de montaj și utilizare**
- (RUS) Руководство по монтажу и эксплуатации**
- (SK) Návod na montáž a obsluhu**
- (SLO) Navodila za montažo in uporabo**
- (UA) Інструкція по монтажу та експлуатації**
- (UAE) تعليمات التركيب والتشغيل**


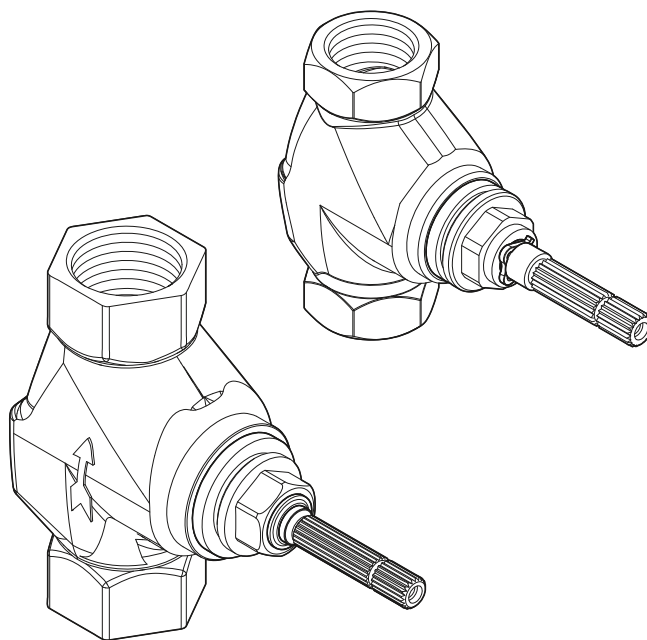


i



 29 209 29 809	A	B	C
	G½ / 15mm	60 - 105mm	max. Ø50mm

 29 211 29 811 53 811	A	B	C
	G¾ / 22mm	65 - 110mm	max. Ø50mm




1.

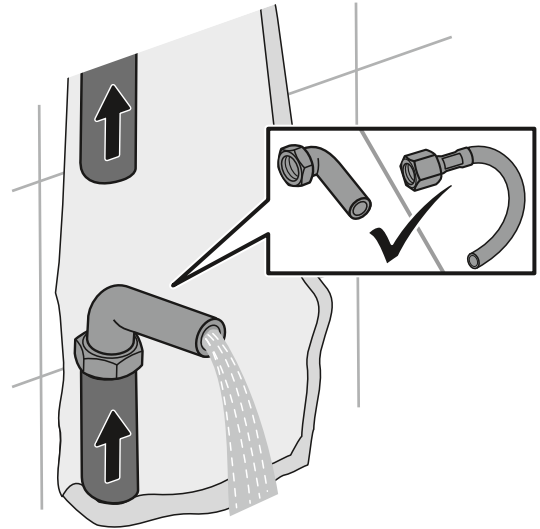

2.

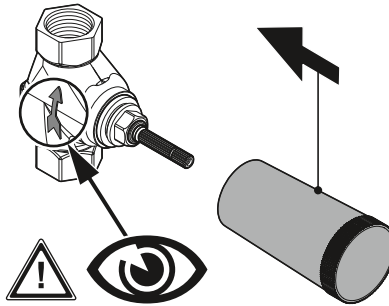

3.

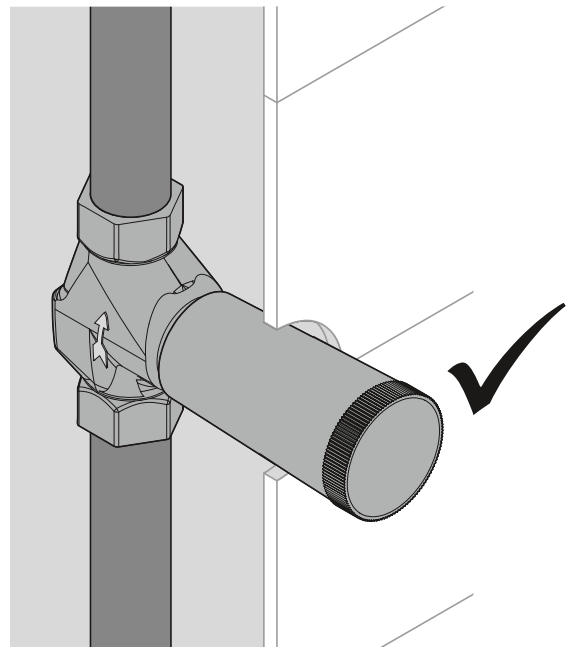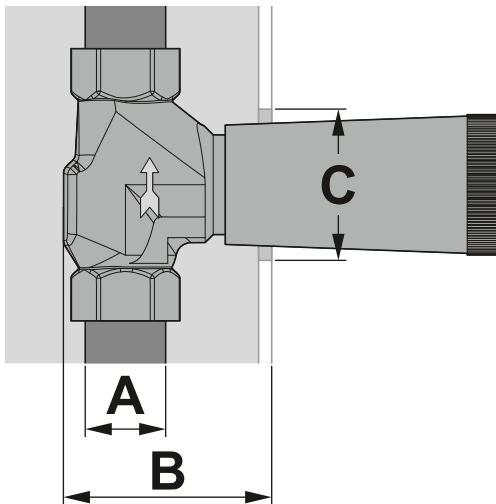

4.

