


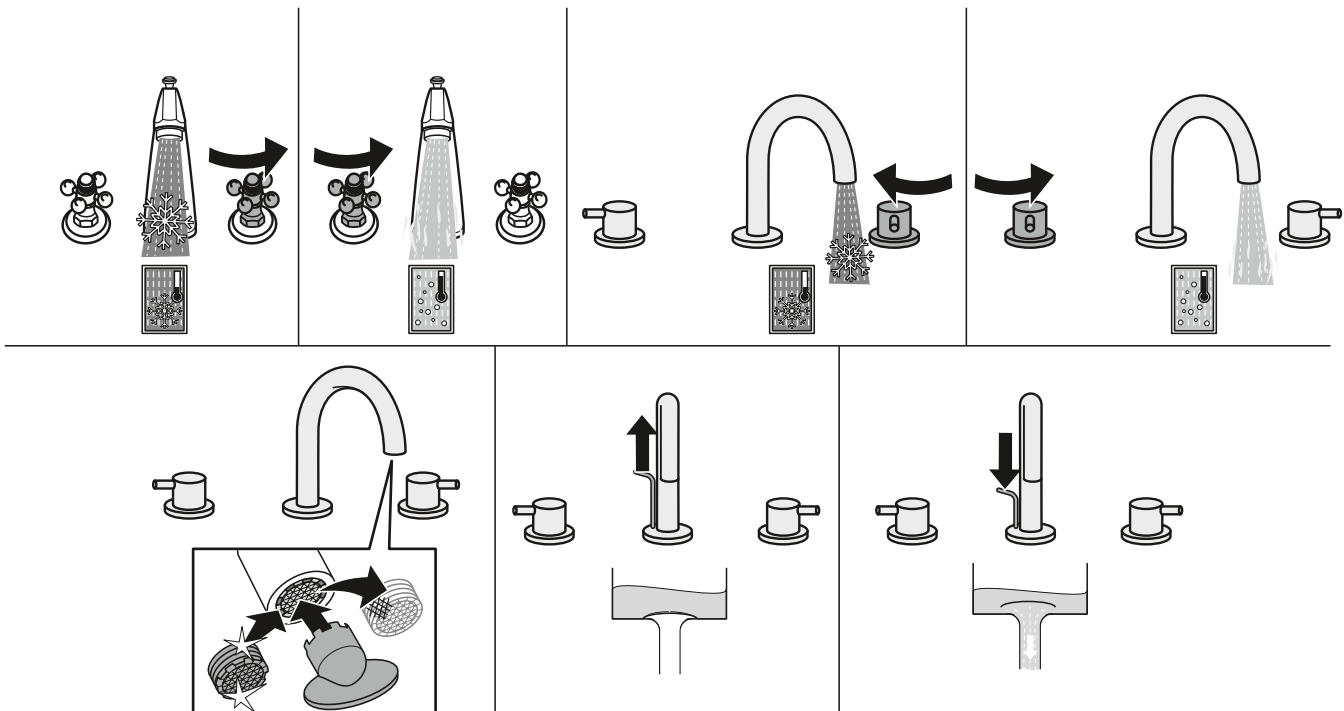

DIN EN 806
DIN EN 1717
DIN 1988
Global Standards

i



°C / °F
max. 70 °C / 158 °F
✓ 60 °C / 140 °F
min. 10 °C / 50 °F












✓ 3 bar / 43,5 psi
min. 1 bar / 14,5 psi
max. 10 bar / 145 psi

3 min.

i www.kludi.com

- (D)** Montage- und Bedienanleitung
- (CN)** 安装及操作指南
- (CZ)** Návod k instalaci a k použití
- (E)** Instrucciones de montaje y de manejo
- (F)** Instructions de montage et mode d'emploi
- (GB)** Installation and operating instructions
- (GR)** ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- (H)** Szerelési és használati utasítás
- (I)** Istruzioni di montaggio e per l'uso
- (NL)** Montagehandleiding en Gebruiksaanwijzing
- (PL)** Instrukcja montażu i obsługi
- (RO)** Instrucțiuni de montaj și utilizare
- (RU)** Руководство по монтажу и эксплуатации
- (SK)** Návod na montáž a obsluhu

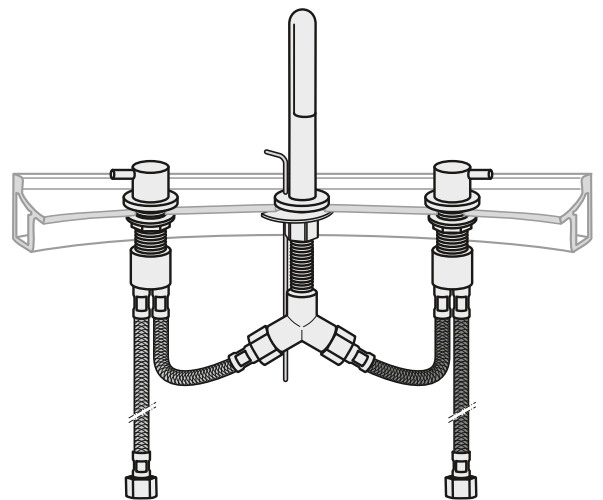

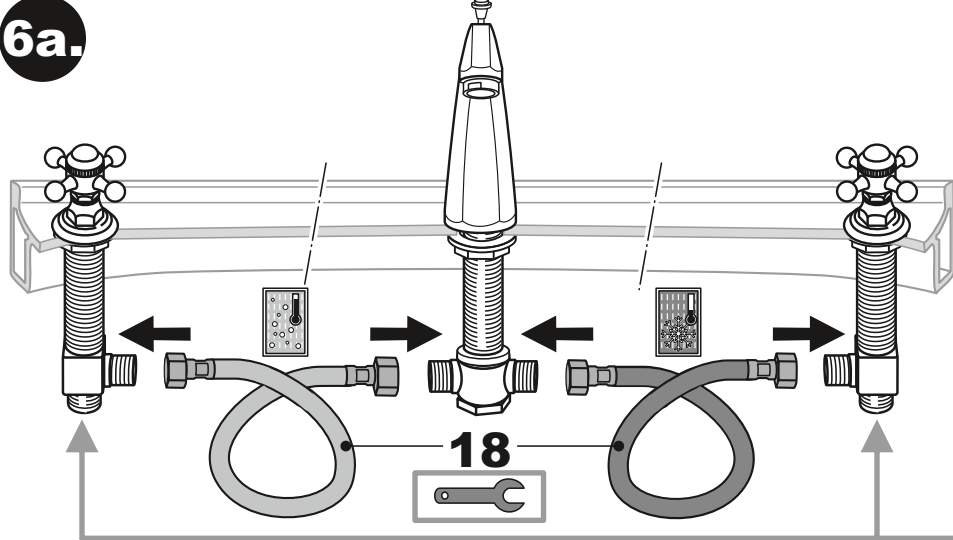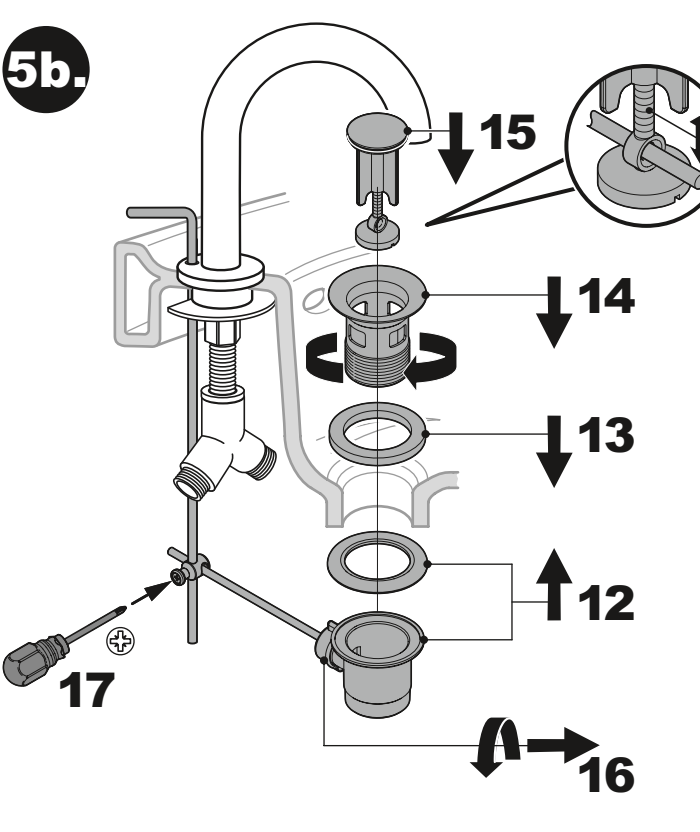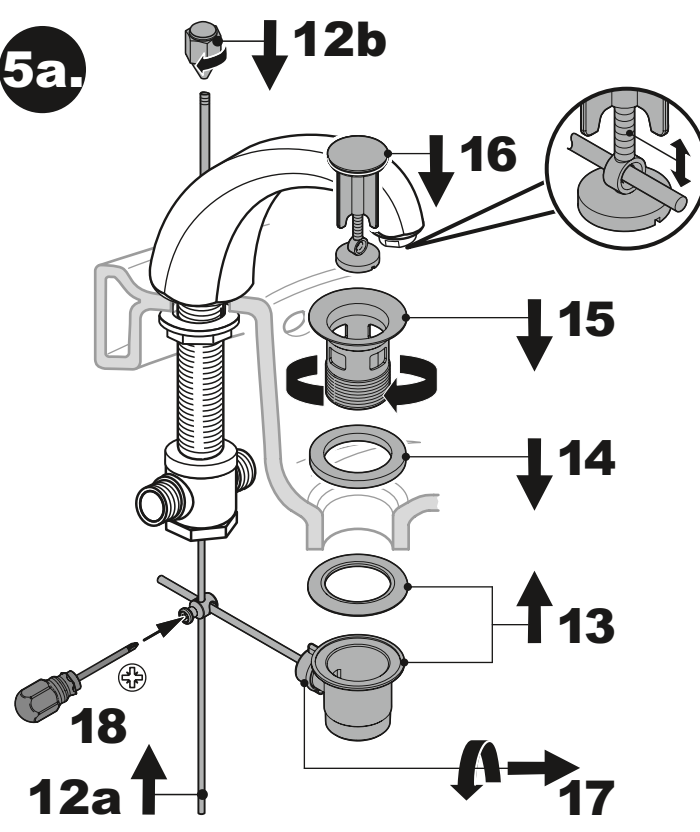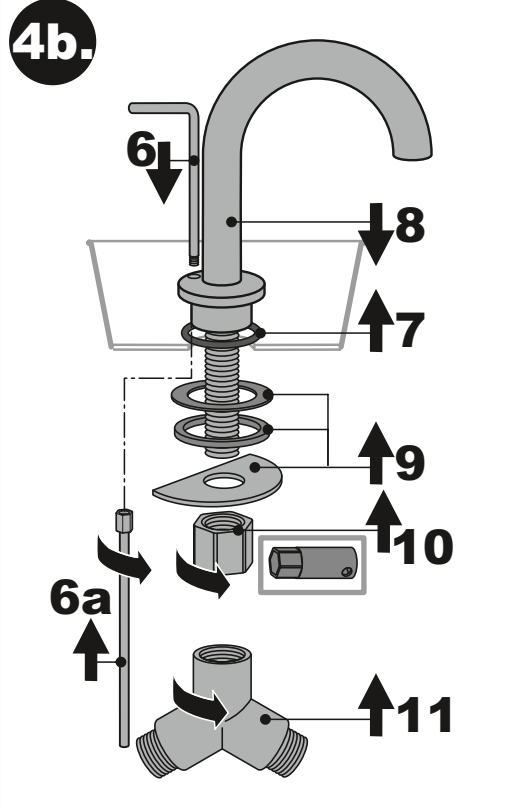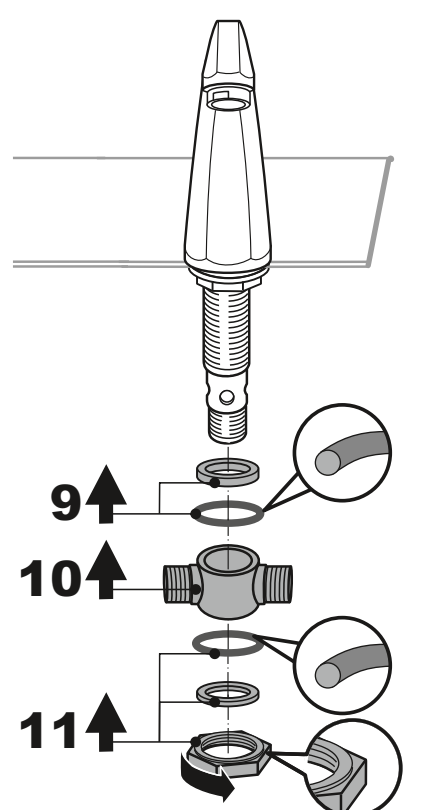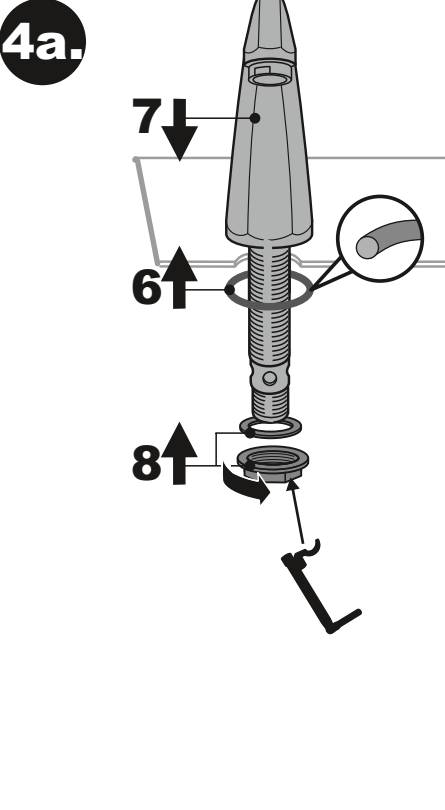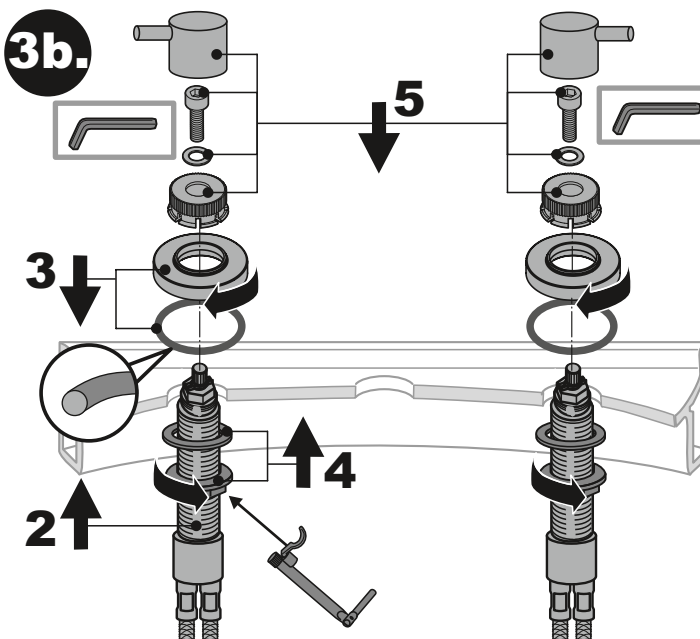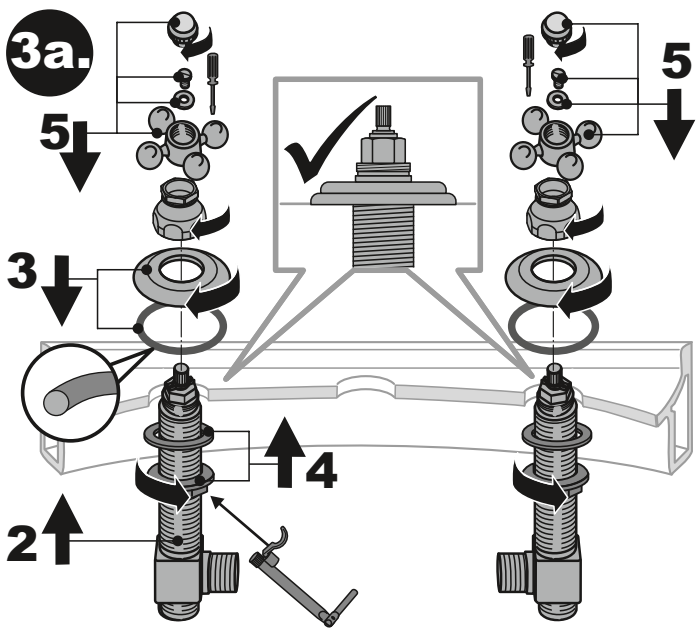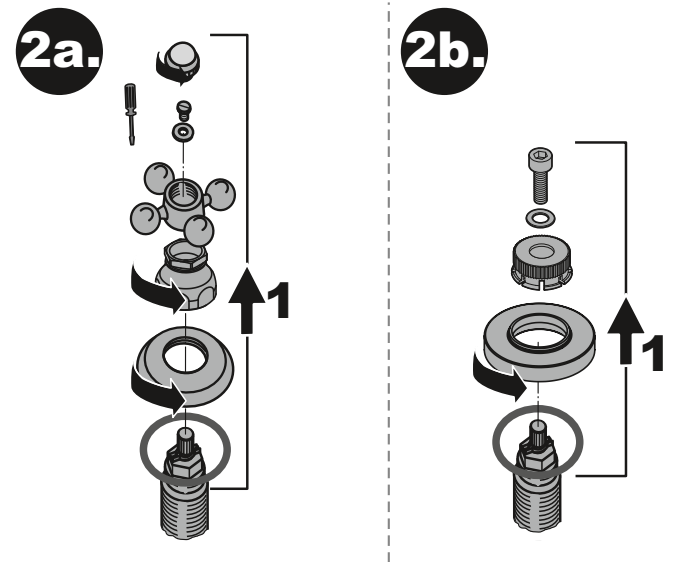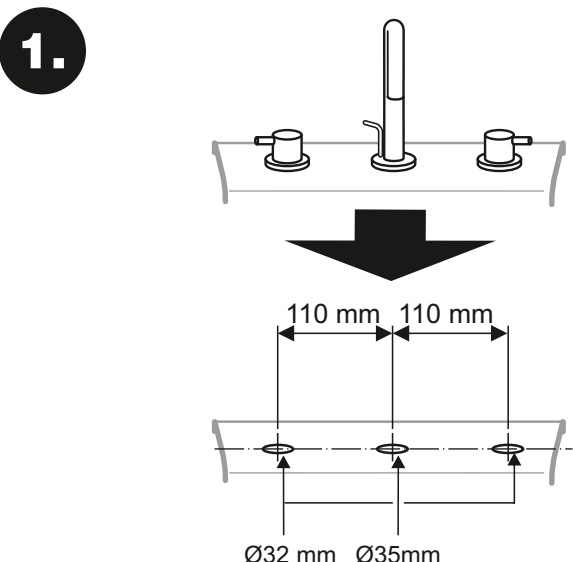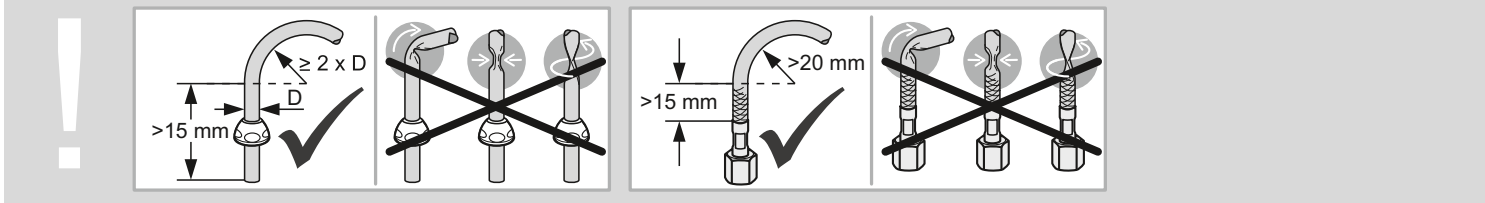

KLUDI

G 1/2 x G 1/2 x 300 mm
75 442 00

G 1/2 x G 1/2 x 400 mm
75 445 00

G 1/2 x G 1/2 x 600 mm
75 446 00

19a

KLUDI

10 x 500 mm,
G 1/2 - G 3/8
16 203 ..

19b

