



DIN EN 806


DIN EN 1717

DIN 1988


Global Standards

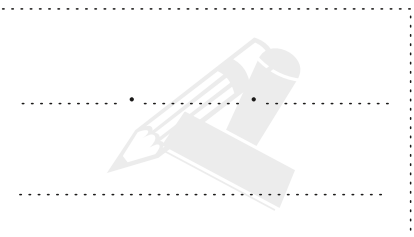





°C / °F



max. 70 °C / 158 °F

✓ 60 °C / 140 °F


min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi



min. 1 bar / 14,5 psi

max. 10 bar / 145 psi




3 min.




max. 70 °C / 158 °F







- Ⓓ Montage- und Bedienanleitung
- ⒸⓃ 安裝及操作指南
- ⒸⓏ Návod k instalaci a k použití
- Ⓔ Instrucciones de montaje y de manejo
- ⒺⓈ Paigaldamine ja kasutamine
- Ⓕ Instructions de montage et d'utilisation
- ⒼⒹ Installation and operating instructions
- ⒼⓇ ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- Ⓕ Szerelési és használati utasítás
- Ⓘ Istruzioni di montaggio e per l'uso
- ⒻⓉ Montavimo ir naudojimo instrukcija
- ⒻⓂ Montāžas un lietošanas instrukcija
- ⒼⓁ Montagehandleiding en Gebruiksaanwijzing
- ⒼⓁ Instrukcja montażu i obsługi
- ⒹⓇ Instrucțiuni de montaj și utilizare
- ⒹⓈ Руководство по монтажу и эксплуатации
- ⒻⓀ Návod na montáž a obsluhu
- ⒻⓁ Navodila za montažo in uporabo
- ⒹⓊ Інструкція по монтажу та експлуатації
- ⒹⓊⓔ تعليمات التركيب والتشغيل

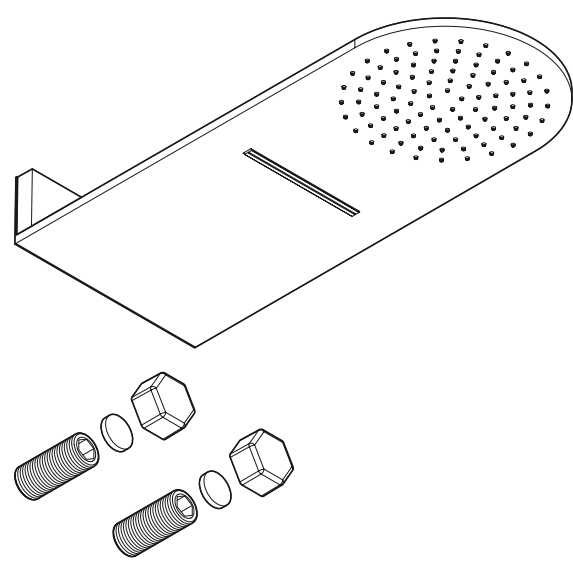

Kludi GmbH & Co. KG

Postfach 25 60

D-58685 Menden

Am Vogelsang 31-33

D-58706 Menden

Telefon:

Telefax:

E-Mail:

Internet:

(D) +49 (0) 23 73 / 904-0

(D) +49 (0) 23 73 / 904-4 65


info.de@kludi.com


www.kludi.com

KLUDI







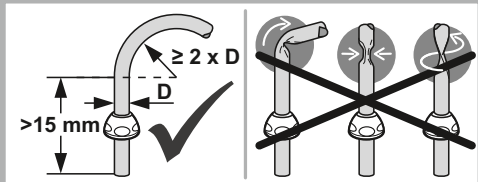

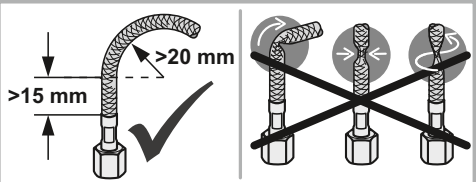



1.

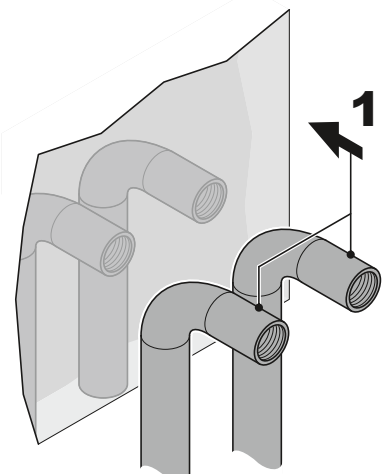

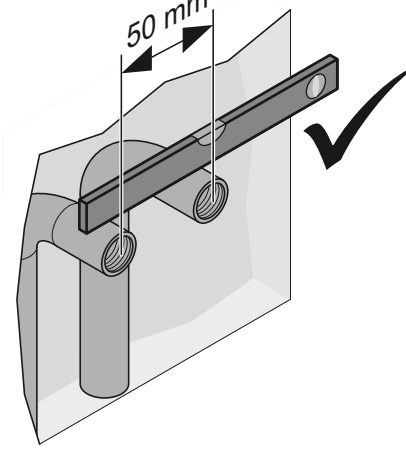



2.

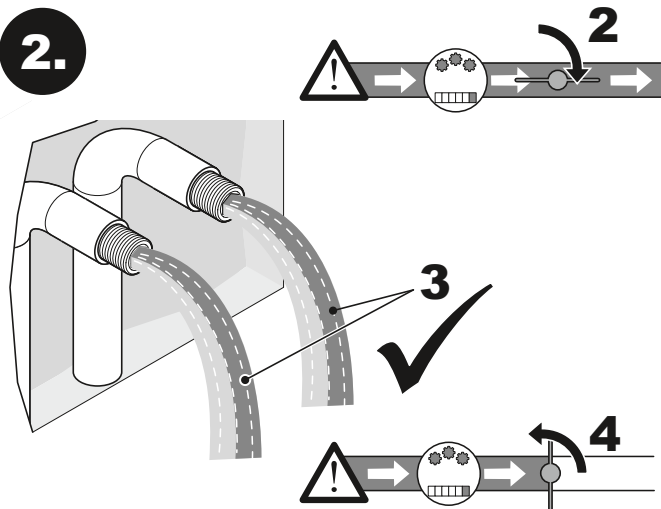

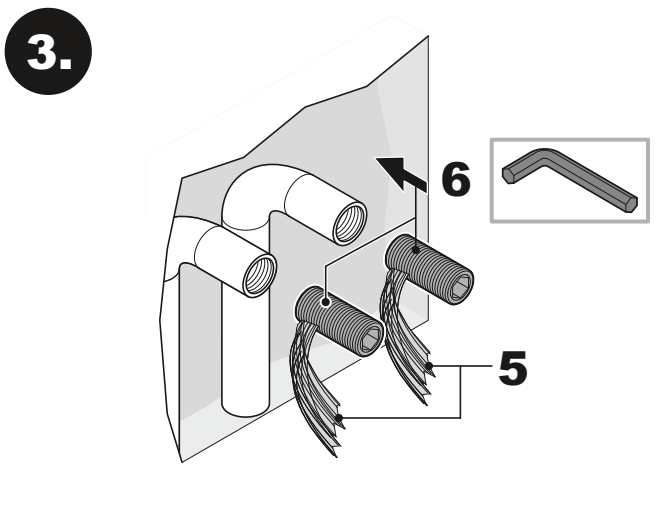


4.

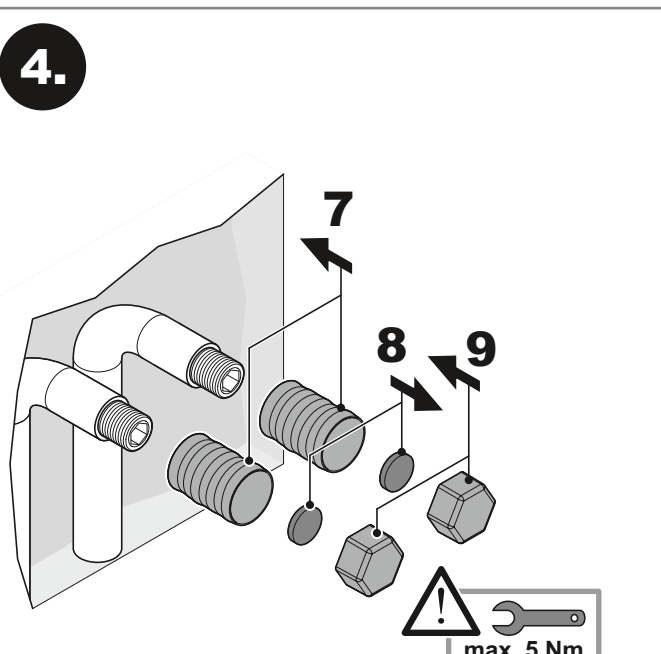


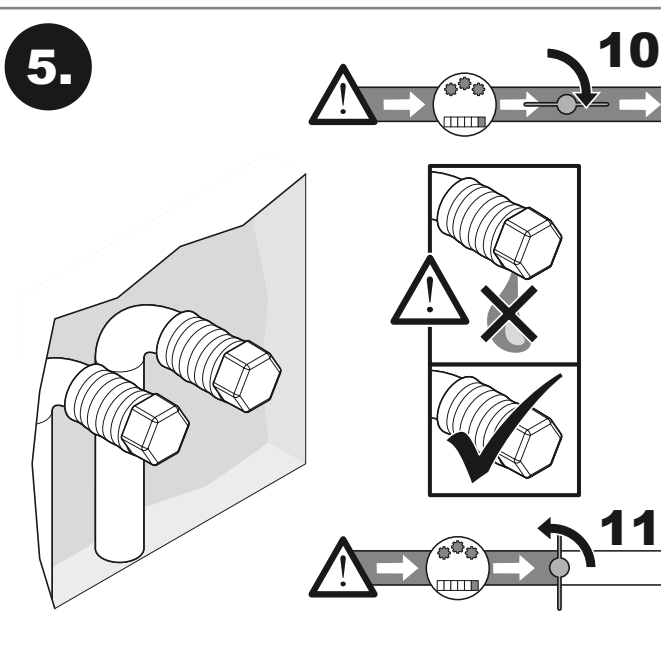


5.

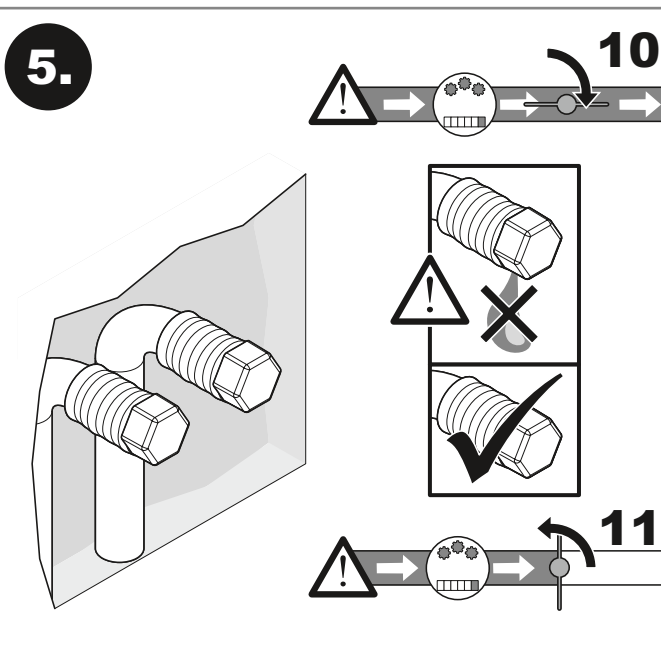


6.

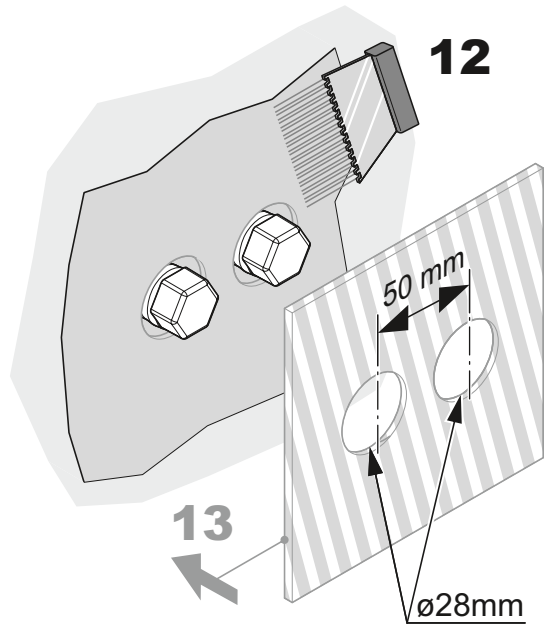


7.

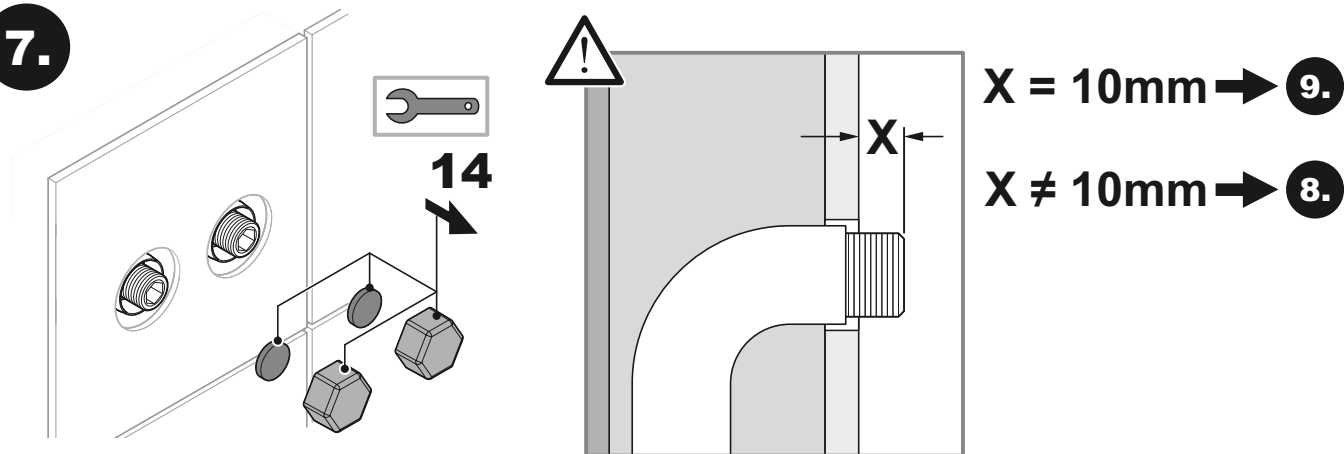


8.

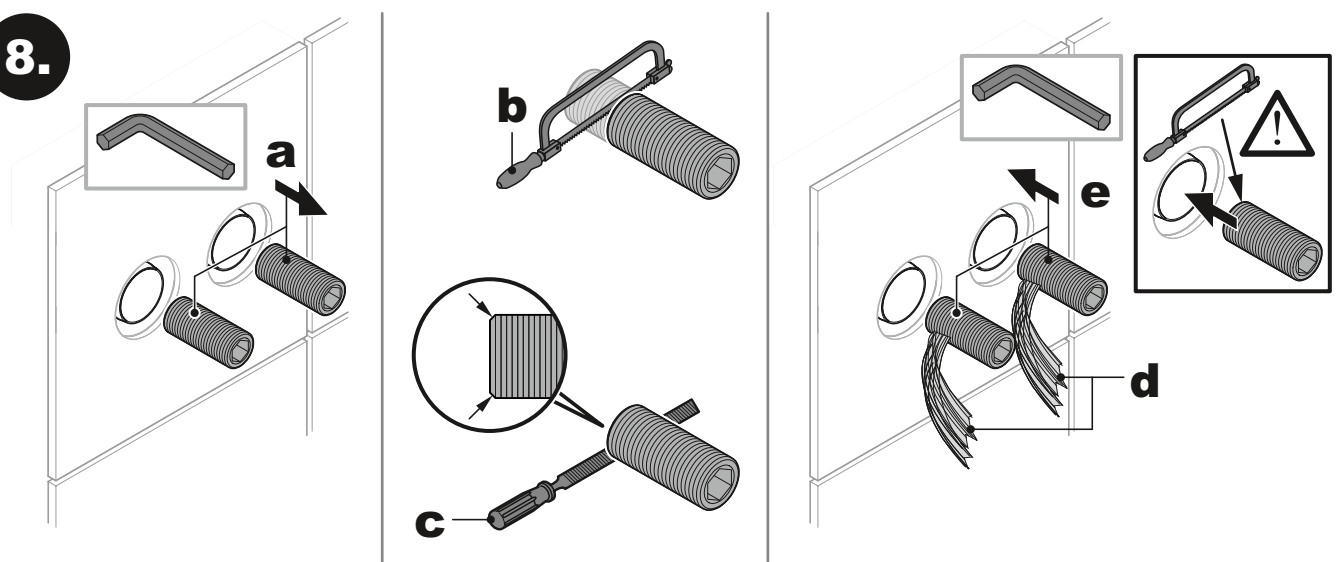


9.

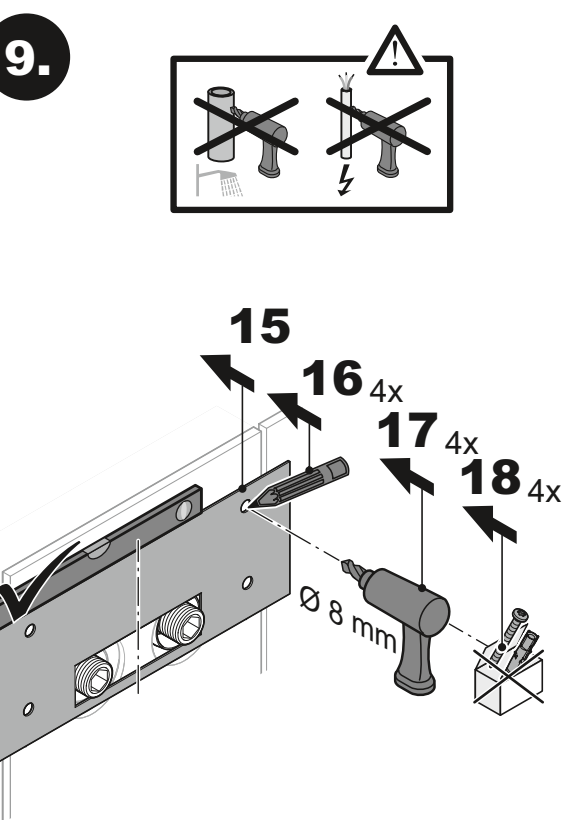


10.

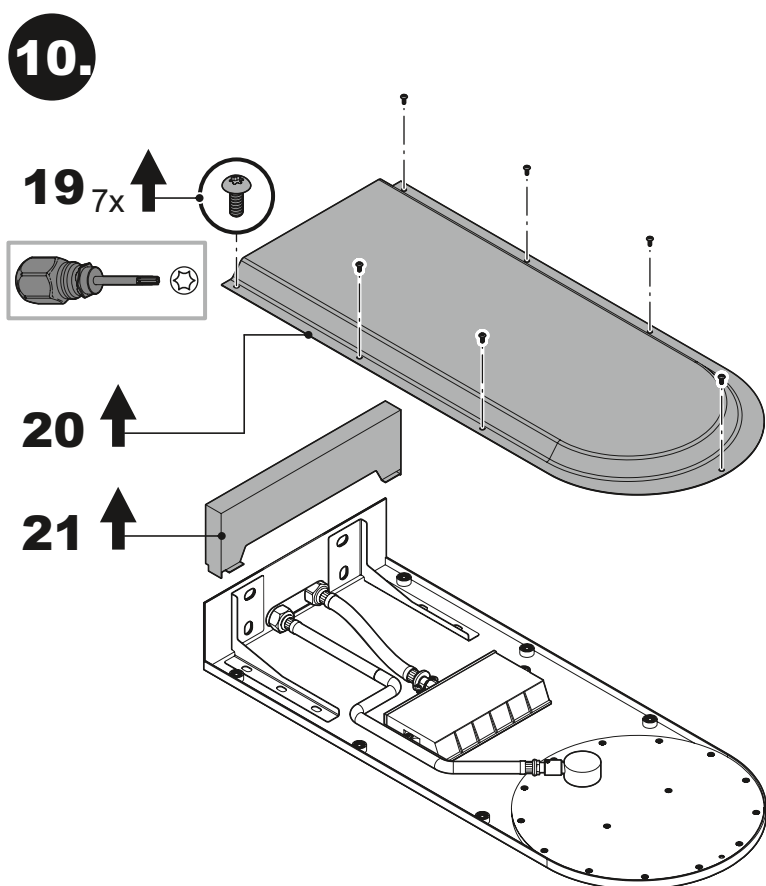


11.

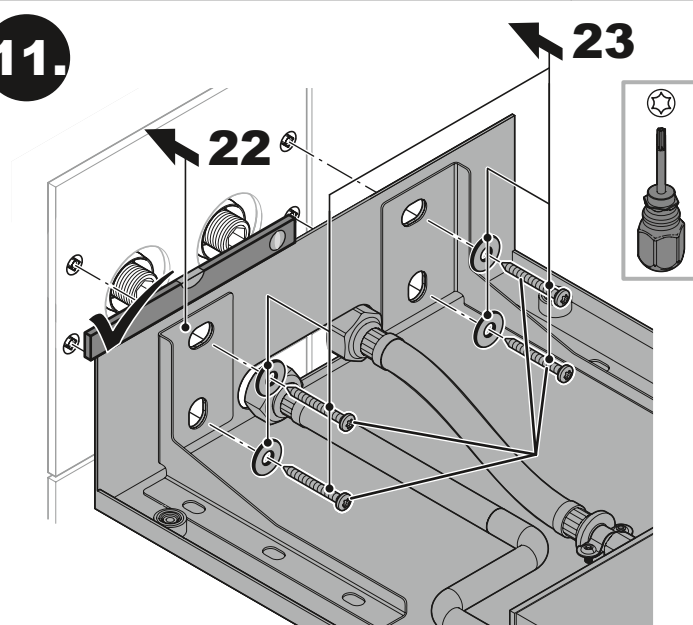


12.

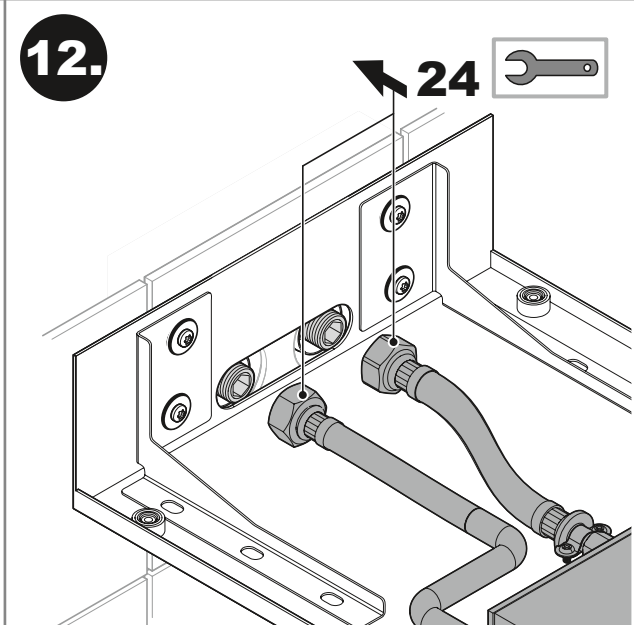

13.

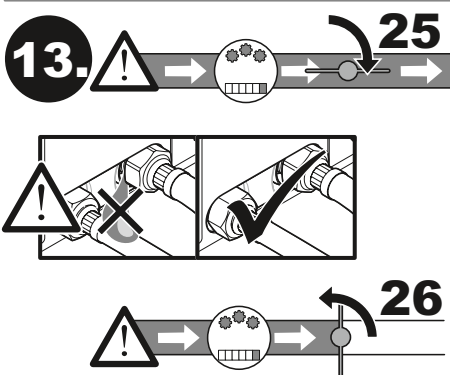

15.

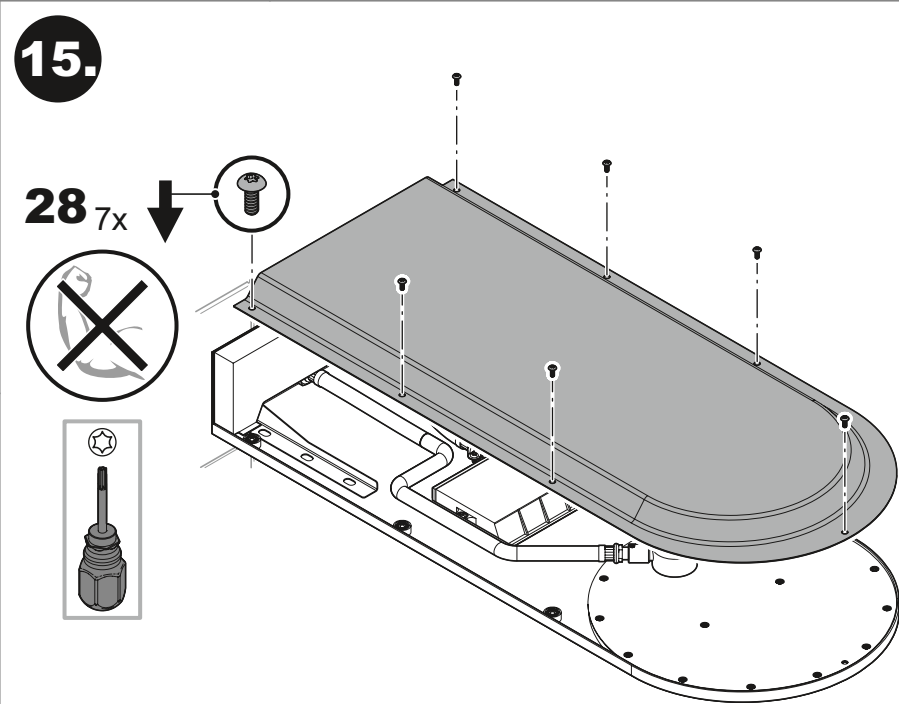

14.

