






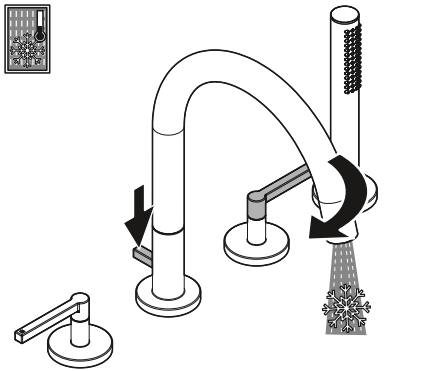


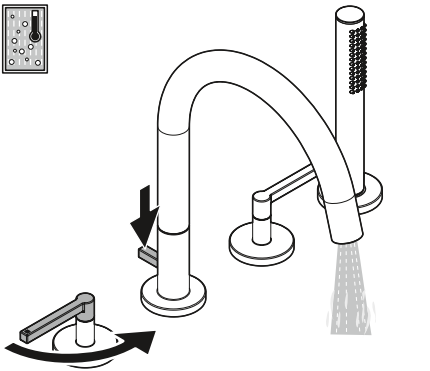

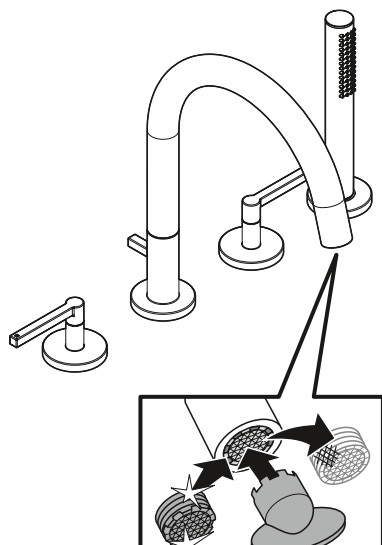

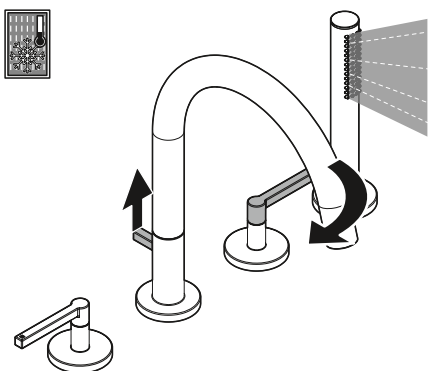

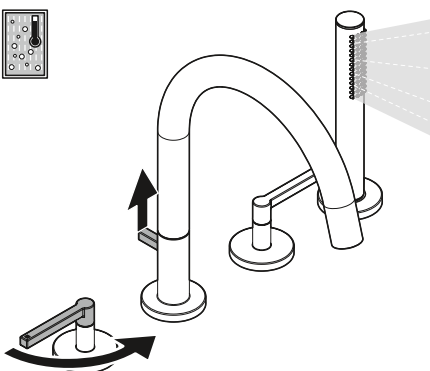

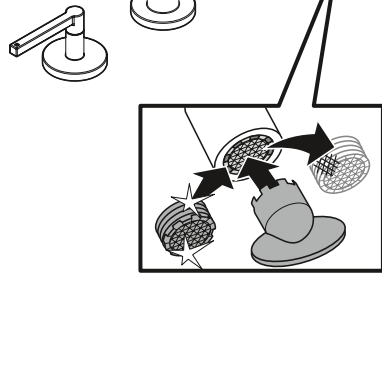





DIN EN 806

DIN EN 1717


DIN 1988

Global Standards





°C / °F




max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi



min. 1 bar / 14,5 psi

max. 10 bar / 145 psi




3 min.



max. 70 °C / 158 °F







- ⓓ

Montage- und Bedienanleitung
- ⒸⓃ

安裝及操作指南
- ⒸⓏ

Návod k instalaci a k použití
- Ⓔ

Instrucciones de montaje y de manejo
- Ⓕ

Instructions de montage et mode d'emploi
- ⒼⒷ

Installation and operating instructions
- ⒼⓇ

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- Ⓗ

Szerelési és használati utasítás
- Ⓘ

Istruzioni di montaggio e per l'uso
- ⓃⓁ


Montagehandleiding en Gebruiksaanwijzing
- ⓅⓁ

Instrukcja montażu i obsługi
- Ⓡⓞ

Instrucțiuni de montaj și utilizare
- ⓇⓊ

Руководство по монтажу и эксплуатации
- ⓈⓀ


Návod na montáž a obsluhu

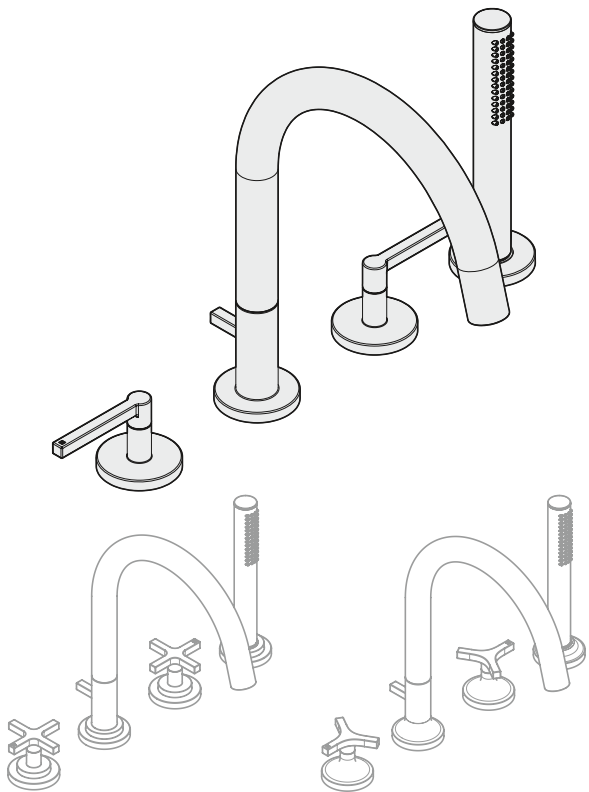



Kludi GmbH & Co. KG
Postfach 25 60
D-58685 Menden
Am Vogelsang 31-33
D-58706 Menden


Telefon: (D) +49 (0) 23 73 / 904-0
Telefax: (D) +49 (0) 23 73 / 904-4 65
E-Mail: info@kludi.de
Internet: www.kludi.com

KLUDI 
WATER IN PERFECTION










1.

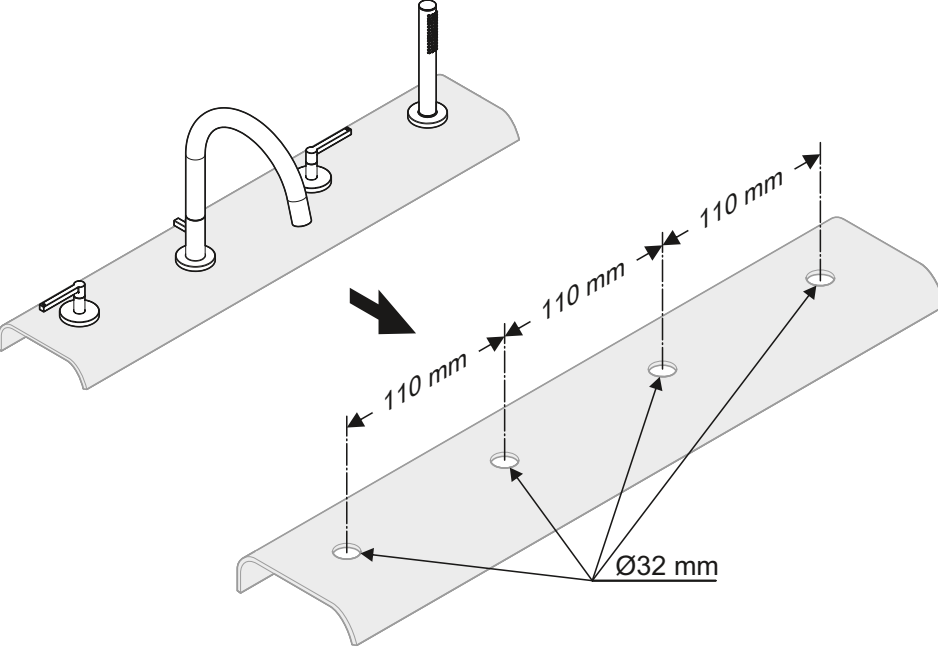


110 mm

110 mm

110 mm

Ø32 mm

2. (2x)

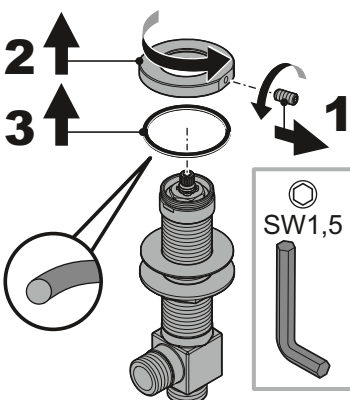







2 ↑

3 ↑


1 ↻

SW1,5


2.

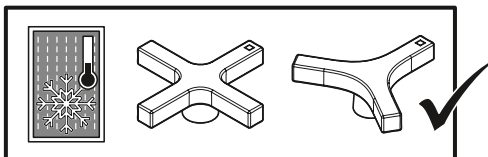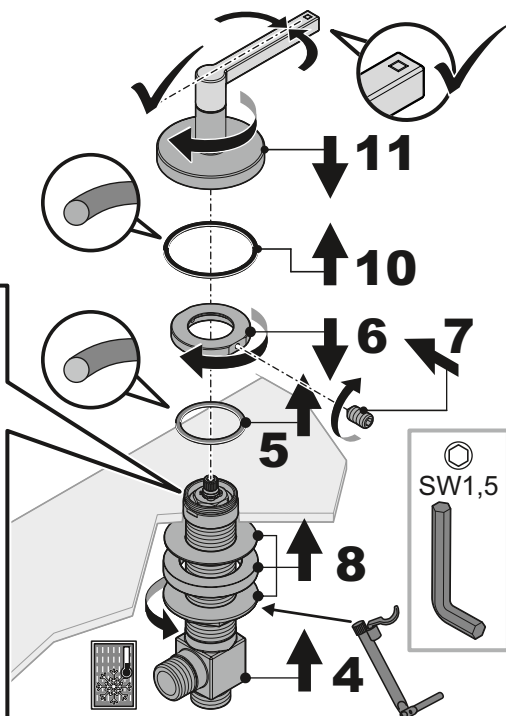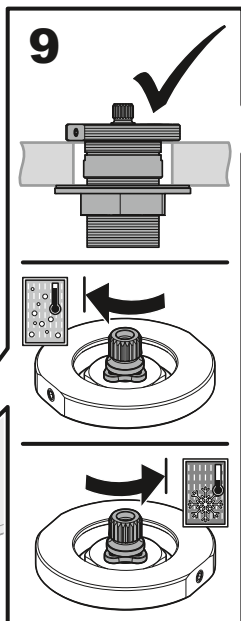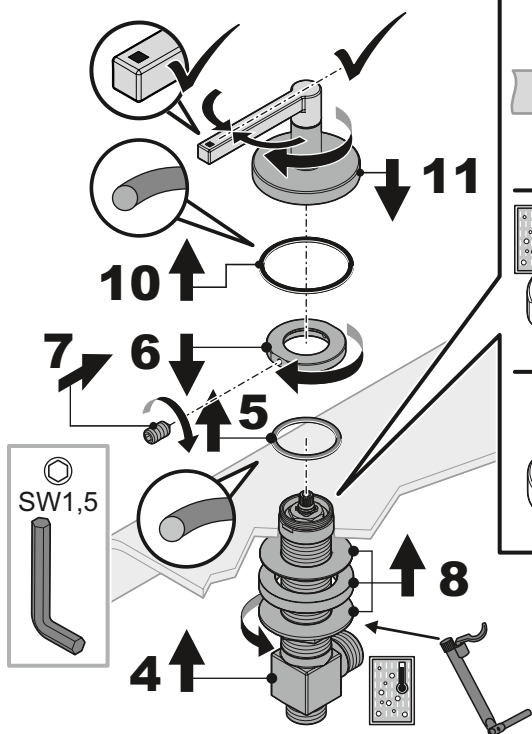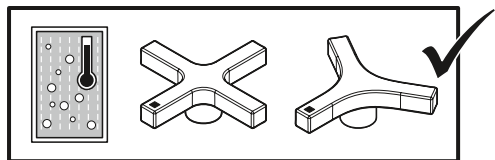


3.

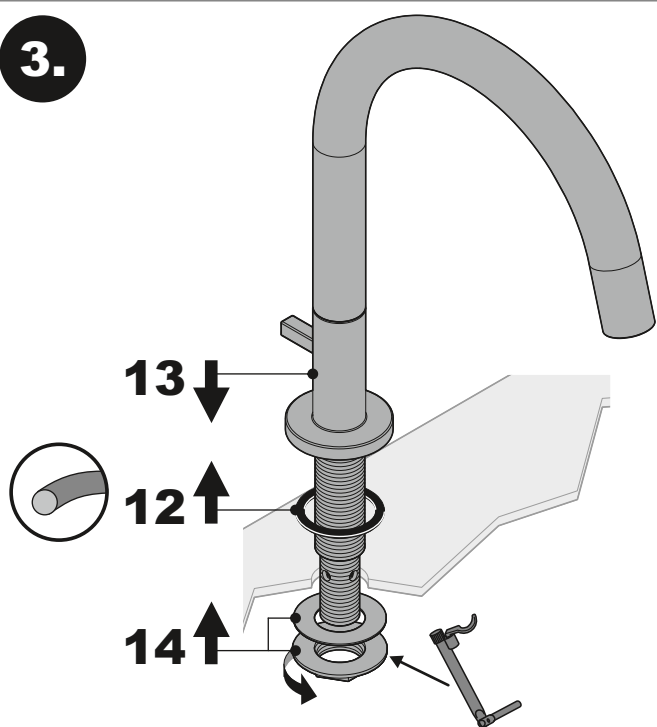


4.

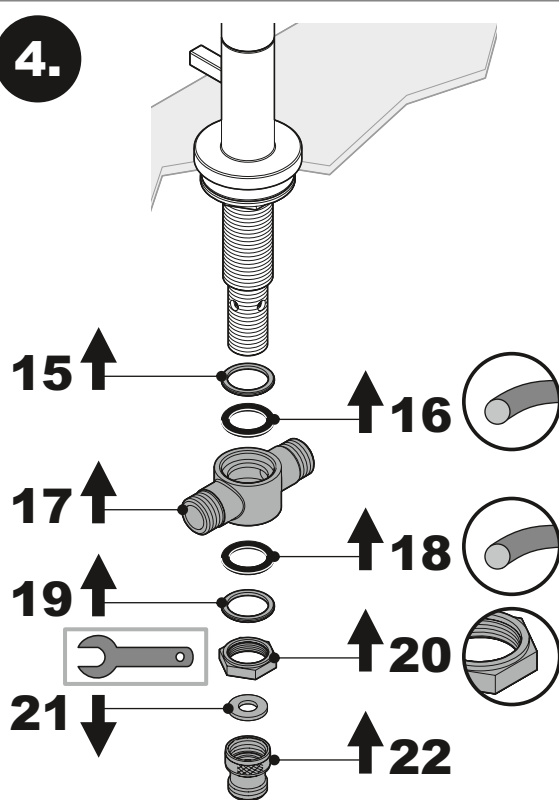

5.

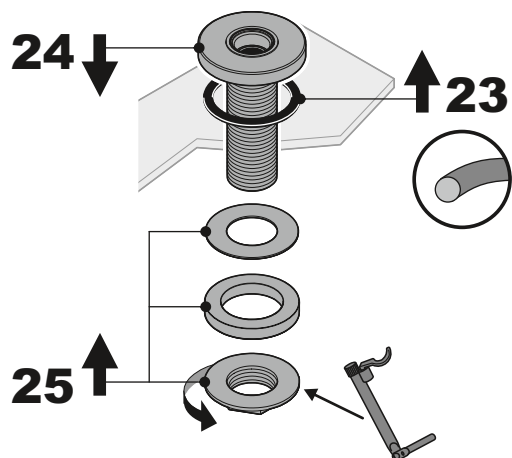

6.

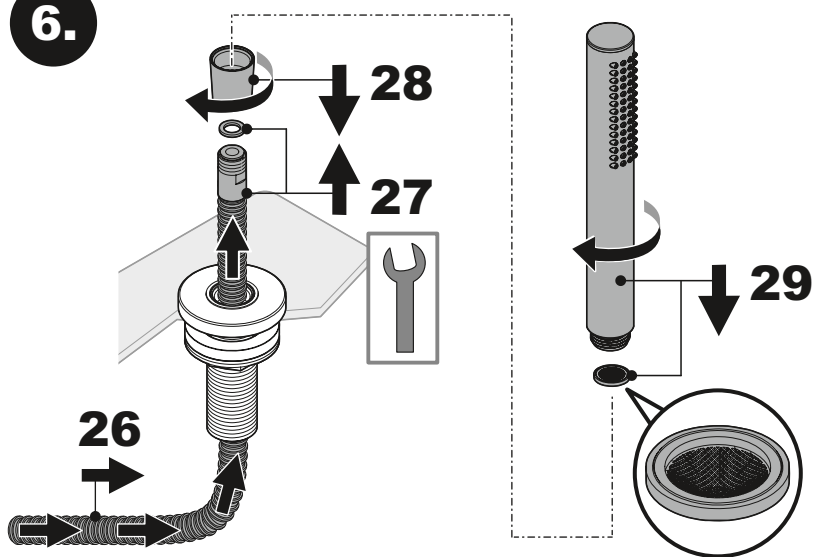

7.

