

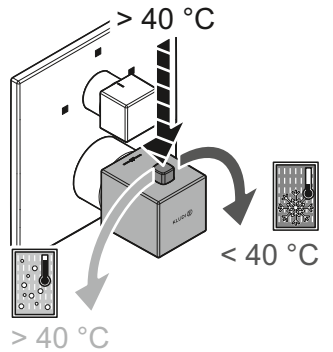



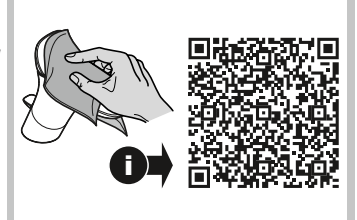
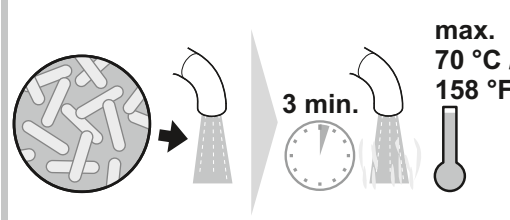

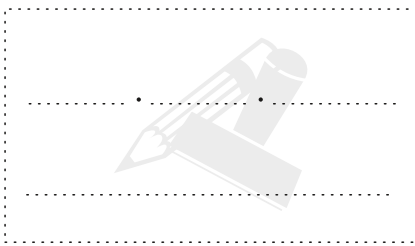



DIN EN 806
DIN EN 1717
DIN 1988
Global
Standards

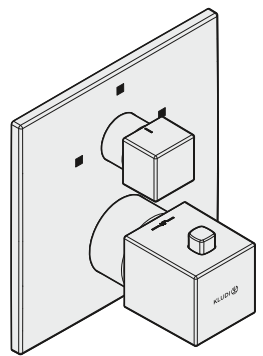



- Ⓓ Montage- und Bedienanleitung
ⒸⓃ 安裝及操作指南
ⒸⓏ Návod k instalaci a k použití
Ⓔ Instrucciones de montaje y de manejo
ⒺⓈ Paigaldamine ja kasutamine
Ⓕ Instructions de montage et d'utilisation
ⒼⒷ Installation and operating instructions
ⒼⓇ ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
Ⓕ Szereelési és használati utasítás
Ⓕ Istruzioni di montaggio e per l'uso
Ⓕ Montavimo ir naudojimo instrukcija
Ⓕ Montāžas un lietošanas instrukcija
Ⓕ Montagehandleiding en Gebruiksaanwijzing
Ⓕ Instrukcja montażu i obsługi
Ⓕ Instrucțiuni de montaj și utilizare
Ⓕ Руководство по монтажу и эксплуатации
Ⓕ Návod na montáž a obsluhu
Ⓕ Navodila za montažo in uporabo
Ⓕ Інструкція по монтажу та експлуатації
Ⓕ تعليمات التركيب والتشغيل




1.

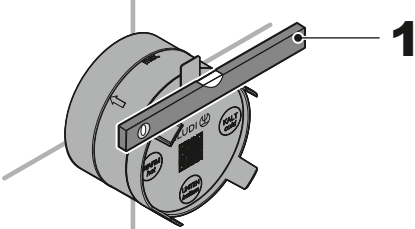


2.

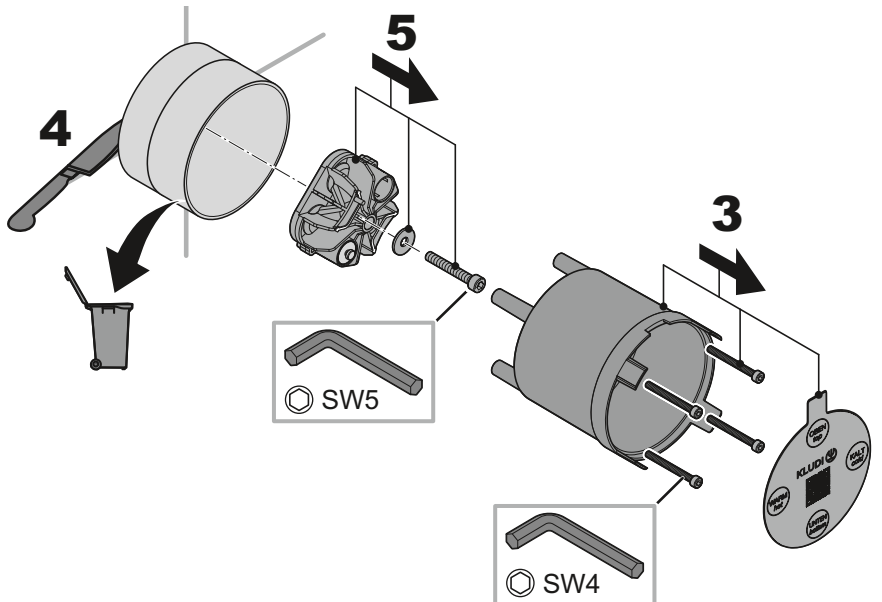

3.

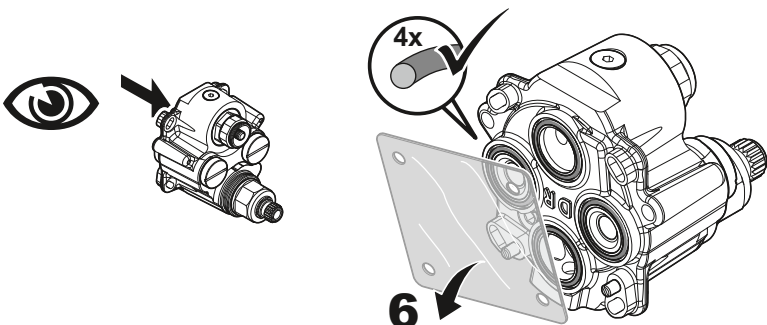

4.

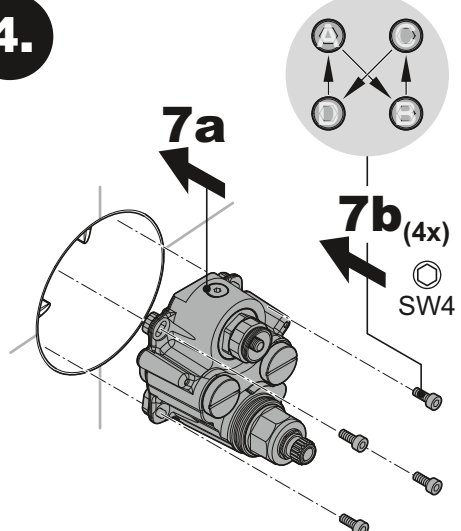

6.

11

12

13

14


9.

22

23

SW 2,5

10.



24

 = $40^{\circ}\text{C} \pm 1^{\circ}\text{C}$   

 $\neq 40^{\circ}\text{C} \pm 1^{\circ}\text{C}$   

25

11.

Diagram 11 shows the power cable being connected to the power supply unit. The power cable is plugged into the power supply unit, which is labeled "KLEVER". A dashed line indicates the connection point. An arrow points to the power supply unit, and the number "25" is shown next to it.