



| Pos. | Part No.     |      |
|------|--------------|------|
| 1    | B 961 375 AA |      |
| 2    | A 861 859 AA |      |
| 3    | A 861 871 AA |      |
| 4    | A 861 872 NU |      |
| 5    | A 861 873 AA |      |
| 6    | A 861 874 NU |      |
| 7    | A 861 500 NU |      |
| 8    | A 861 875 NU |      |
| 9    | A 861 861 NU |      |
| 10   | A 960 890 NU |      |
| 11   | A 963 143 NU |      |
| 12   | A 7851 AA    | 10mm |
|      | A 7877 AA    | 20mm |
| 13   | A 960 704 NU | 20mm |
|      | A 962 476 NU | 40mm |



# Ceraflex 2027


## BE544AA







1025 / A 869 297  
Made in Germany

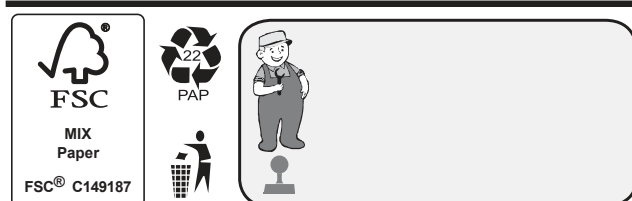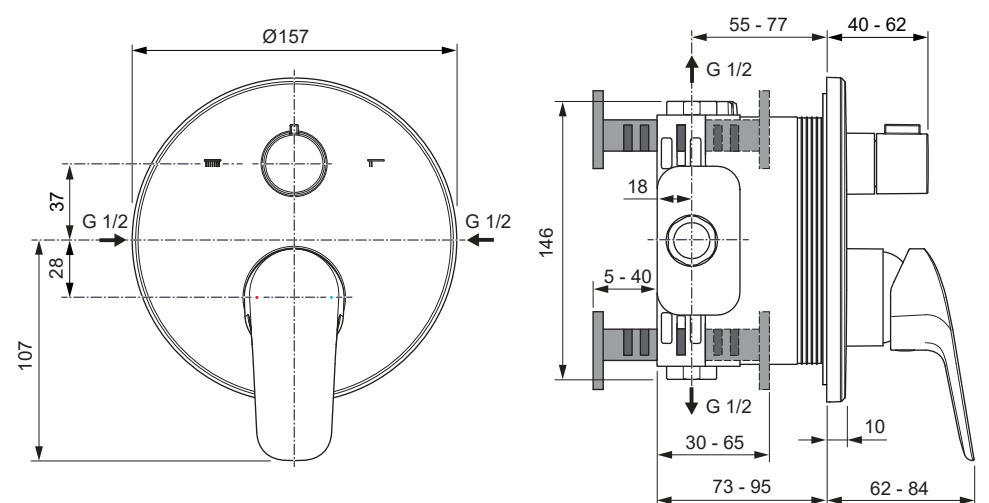

Ideal Standard International NV  
Corporate Village – Gent Building  
Da Vincilaan 2  
1935 Zaventem  
Belgium

www.idealstandard.com



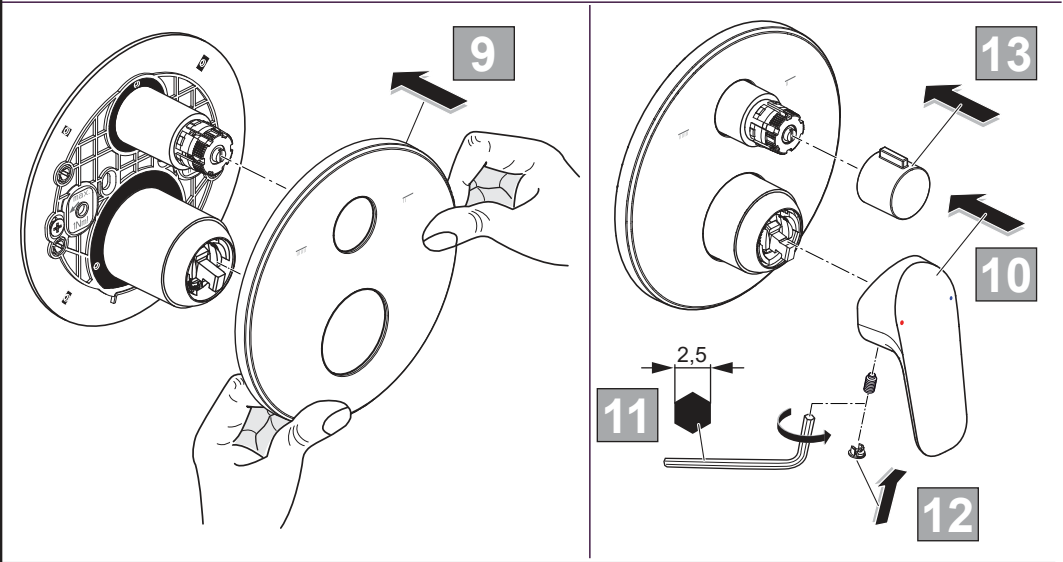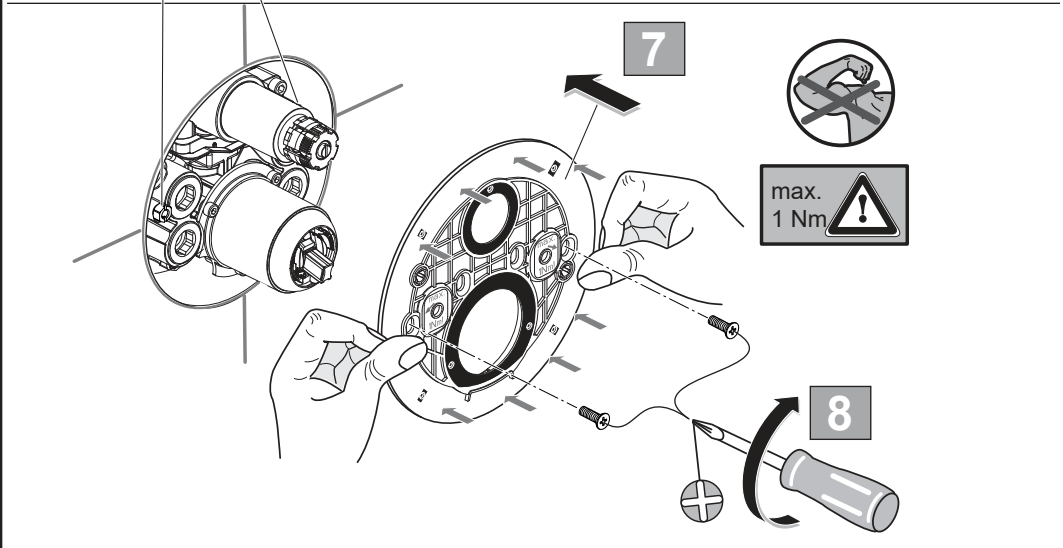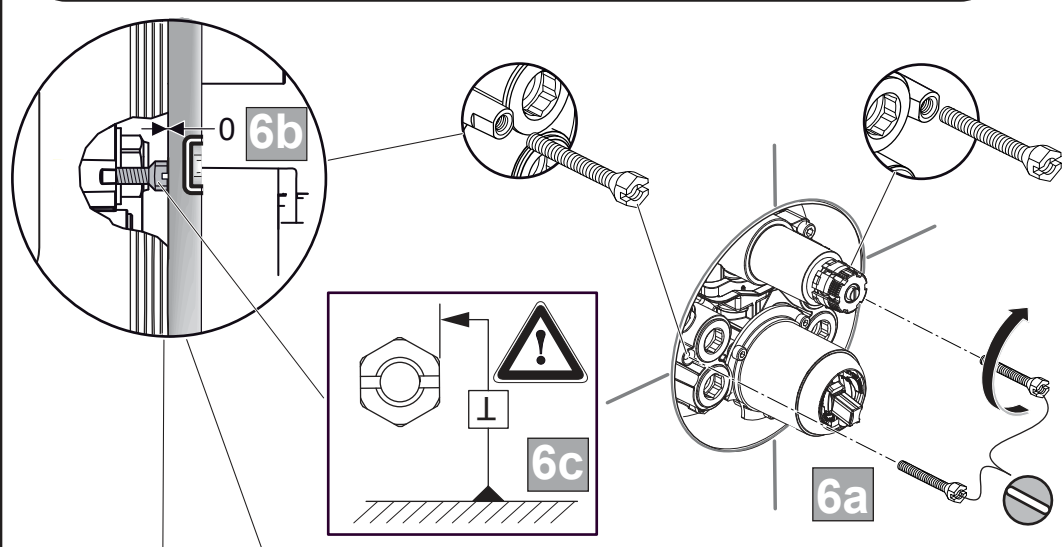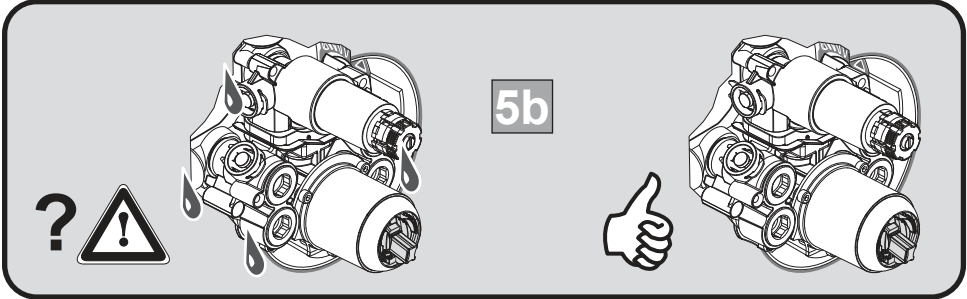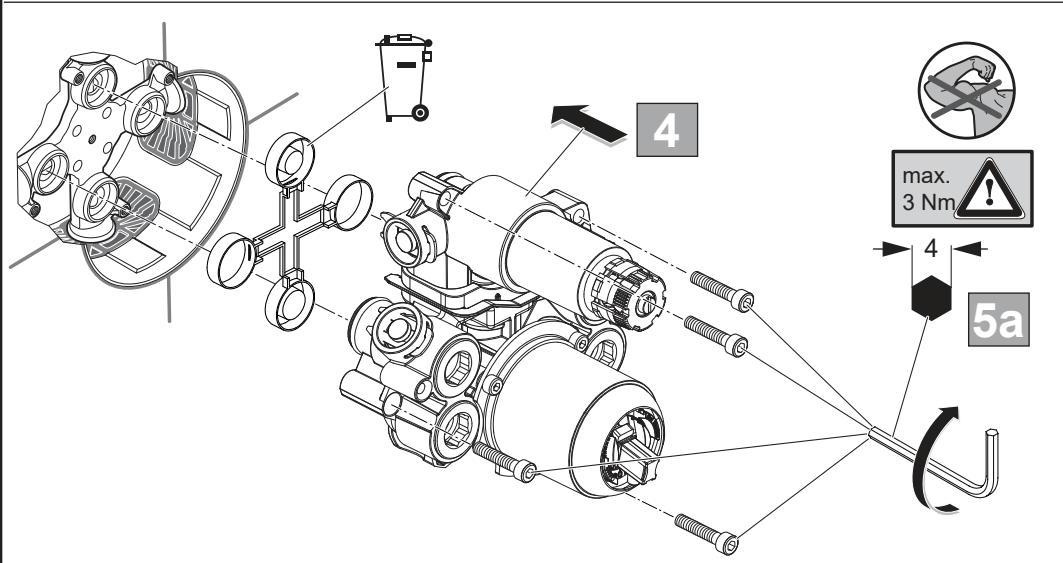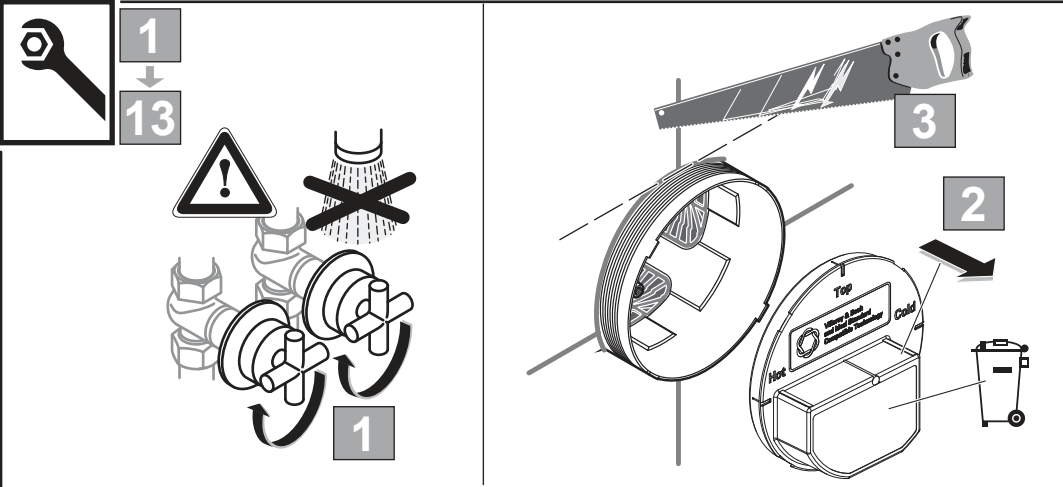

| <br>0,3 MPa<br>3 bar | <br>50°C<br>65°C<br>85°C | <br>15°C<br>15°C<br>15°C | 0  | 1  | 2  | 3  | 4  | 5  |
|----------------------|--------------------------|--------------------------|----|----|----|----|----|----|
|                      |                          |                          | °C | °C | °C | °C | °C | °C |
|                      | 50°C                     | 15°C                     | 50 | 49 | 44 | 40 | 35 | 33 |
|                      | 65°C                     | 15°C                     | 65 | 63 | 57 | 50 | 44 | 40 |
|                      | 85°C                     | 15°C                     | 85 | 83 | 74 | 64 | 56 | 50 |



|         |                    |              |                  |
|---------|--------------------|--------------|------------------|
| <br>bar | <br>MAX. 10<br>0,5 | <br>5<br>1   | <br>Q<br>(3 bar) |
| <br>°C  | <br>MAX. 80        | <br>65<br>55 | <br>l/min<br>21  |